

Trimble TSC710 controller

User Guide

Version 1.00
Revision A
October 2025

Legal information

Trimble Inc.

trimble.com

Copyright and trademarks

© 2025, Trimble Inc. All rights reserved.

Trimble and the Globe & Triangle logo are trademarks of Trimble Inc., registered in the United States and in other countries. Access is a trademark of Trimble Inc.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Google, Google Play and other marks are trademarks of Google LLC. The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Inc. is under license.

All other trademarks are the property of their respective owners.

Release Notice

This is the October 2025 version 1.00 release (Revision A) of the Trimble TSC710 controller documentation.

Recycling information

You should dispose of the device and accessories properly according to local laws and regulations. Because the device contains electronic components, it must be disposed of separately from household waste. When the device reaches its end of life, contact your local Trimble dealer to learn about disposal and recycling options for your area.

Recycling in Europe



The symbol above means that according to local laws and regulations your product and/or its battery shall be disposed of separately from household waste. When this product reaches its end of life, take it to a collection point designated by local authorities. The separate collection and recycling of your product and/or its battery at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.

For information about recycling Trimble WEEE (Waste Electrical and Electronic Equipment) products that run on electrical power go to <https://www.trimble.com/en/our-commitment/responsible-business/product-compliance/environmental-compliance>.

The ERFC Netherlands will recycle on behalf of Trimble Distributors, conforming to the European Union's WEEE Directive 2002/96/EC, any WEEE supplied to the market by Trimble Inc., their partners and/or subsidiaries.

Taiwan – Battery Recycling Requirements



The product contains a Lithium-ion battery. Taiwanese regulations require that waste batteries are recycled.

廢電池請回收

Regional compliance

Australia and New Zealand



This product conforms with the regulatory requirements of the Australian Communications and Media Authority (ACMA) Telecommunications, Radiocommunications and EMC Labelling Notices, thus satisfying the requirements for RCM marking and sale within Australia and New Zealand.

Europe



BE	BG	CZ	DK
DE	EE	IE	EL
ES	FR	HR	IT
CY	LV	LT	LU
HU	MT	NL	AT
PL	PT	RO	SI
SK	FI	SE	UK

This Trimble product has been tested and found to comply with all requirements for CE Marking and sale within the European Economic Area (EEA). The device has Bluetooth and wireless LAN approval and satisfies the requirements for Radio and Telecommunication Terminal Equipment specified by European Council Directive 2014/53/EU. These requirements provide reasonable protection against harmful interference when the equipment is operated appropriately in a residential or commercial environment.

European declaration of conformity

Manufacturer's Name: Trimble Inc.

Manufacturer's Address: 4450 Gibson Dr, Tipp City, OH 45371, USA

Declares, under our sole responsibility, that the product:

- Product Name: TSC710
- Model Number: 140000

conforms to the following Product Specifications:


- EMC : 2014/30/EU
- LVD : 2014/35/EU
- RED : 2014/53/EU

The full text of the EU declaration of conformity is available on request at trimble.com.

Importer of Record

Trimble European Regional Fulfillment Center
Logistics Manager
Trimble Europe B.V. & Trimble International B.V.
Industrieweg 187a
5683 CC Best
The Netherlands

Trimble EC



Trimble Germany
Am Prime Parc 11
65479 Raunheim
Germany

CAUTION - Only approved accessories may be used with this equipment. In general, all cables must be high quality, shielded, correctly terminated and normally restricted to two meters in length. Power supplies approved for this product employ special provisions to avoid radio interference and should not be altered or substituted. Unapproved modifications or operations beyond or in conflict with these instructions for use may void authorization by the authorities to operate the equipment.

Power and frequencies used by the TSC710 controller

Technologies	Frequency range (MHz)	E.R.P. / E.I.R.P.
WCDMA Band I	1920-1980 MHz (uplink) 2110-2170 MHz (downlink)	27.58
WCDMA Band VIII	880-915 MHz (uplink) 925-960 MHz (downlink)	22.94
LTE Band 1 / 5G NR n1	1920-1980 MHz (uplink) 2110-2170 MHz (downlink)	27.08 (LTE), 28.58(5G NR)
LTE Band 3 / 5G NR n3	1710-1785 MHz (uplink) 1805-1880 MHz (downlink)	28(LTE), 29.5(5G NR)
LTE Band 7 / 5G NR n7	2500-2570 MHz (uplink) 2620-2690 MHz (downlink)	25.83(LTE), 27.33(5G NR)
LTE Band 8 / 5G NR n8	880-915 MHz (uplink) 925-960 MHz (downlink)	22.44(LTE), 23.94(5G NR)
LTE Band 20 / 5G NR n20	832-862 MHz (uplink) 791-821 MHz (downlink)	25.62(LTE), 27.12(5G NR)
LTE Band 28/ 5G NR n28	703-748MHz (uplink) 758-803 MHz (downlink)"	25.72(LTE), 27.22(5G NR)
LTE Band 34	2010 - 2025 MHz (uplink) / (downlink)	27.57
LTE Band 38 / 5G NR n38	2570-2620 MHz (uplink) / (downlink)	26.87(LTE), 28.37(5G NR)
LTE Band 40 / 5G NR n40	2300-2400 MHz (uplink) / (downlink)	25.83(LTE), 27.83(5G NR)
LTE Band 41 / 5G NR 41	2496-2690 MHz (uplink) / (downlink)	27.43(LTE), 28.93(5G NR)
LTE Band 41_HPUE / 5G NR 41 HPUE	2496-2690 MHz (uplink) / (downlink)	29.43(LTE), 30.93(5G NR)
LTE Band 42	3400-3600 MHz (uplink) / (downlink)	26.59
LTE Band 42_HPUE	3400-3600 MHz (uplink) / (downlink)	27.59
LTE Band 43	3600 - 3800 MHz (uplink) / (downlink)	26.77
LTE Band 43_HPUE	3600 - 3800 MHz (uplink) / (downlink)	28.77
LTE Band 46	5150-5725 MHz (downlink)	-
5G NR n77 / 5G NR n77_HPUE	3300-4200 MHz (uplink) / (downlink)	26.18

Technologies	Frequency range (MHz)	E.R.P. / E.I.R.P.
5GNR n78 / 5GNR n787_HPUE	3300-3800 MHz (uplink) / (downlink)	25.68
Bluetooth EDR	2400-2483.5 MHz	18.3
Bluetooth LE	2400-2483.5 MHz	9.99
WLAN 2.4 GHz	2400-2483.5 MHz	19.92
WLAN 5 GHz	5150-5350 MHz	22.91
WLAN 5 GHz	5470-5725 MHz	19.97
WLAN 5 GHz	5725-5875 MHz	13.94
NFC	13.56 MHz	-14.13@dBuV/m @ 10m
GPS	1559-1610 MHz, 1164-1215MHz	-

Canada

IC ID: 5817A-140000

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus as set out in the radio interference regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de Classe B prescrites dans le règlement sur le brouillage radioélectrique édicté par le Ministère des Communications du Canada.

Changes and modifications not expressly approved by the manufacturer or registrant of this equipment can void your authority to operate this equipment under Industry Canada rules.

Les changements et modifications non expressément approuvés par le fabricant ou le détenteur de cet équipement peuvent annuler votre droit à utiliser cet appareil en vertu des règles d'Industrie Canada.

Licence exempt

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

IMPORTANT NOTE: IC Radiation Exposure Statement

For satisfying FCC RF exposure compliance requirements, body-worn operations are restricted to belt-clips, holsters or similar accessories that have no metallic component in the assembly and must provide at least 10 mm separation between the device and the user's body. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter. The County Code Selection feature is disabled for products marketed in the US/Canada.

Pour satisfaire aux exigences de conformité d'exposition RF de la FCC, les opérations portées sur le corps sont limitées aux clips de ceinture, aux étuis ou aux accessoires similaires qui n'ont pas de composant métallique dans l'assemblage et doivent fournir une séparation d'au moins 10 mm entre l'appareil et le corps de l'utilisateur. Cet appareil et son (ses) antenne (s) ne doivent pas être colocalisés ou fonctionner avec une autre antenne ou émetteur. La fonction de sélection du code de comté est désactivée pour les produits commercialisés aux États-Unis / au Canada.

IC SAR warning

Radio Frequency (RF) Exposure Information

The radiated output power of the Wireless Device is below the Industry Canada (IC) radio frequency exposure limits. The Wireless Device should be used in such a manner such that the potential for human contact during normal operation is minimized.

This device has been evaluated for and shown compliant with the IC Specific Absorption Rate ("SAR") limits when installed in specific host products operated in portable exposure conditions.

Informations concernant l'exposition aux fréquences radio (RF)

La puissance de sortie émise par l'appareil de sans fil est inférieure à la limite d'exposition aux fréquences radio d'Industry Canada (IC). Utilisez l'appareil de sans fil de façon à minimiser les contacts humains lors du fonctionnement normal.

Ce périphérique a été évalué et démontré conforme aux limites SAR (Specific Absorption Rate – Taux d'absorption spécifique) d'IC lorsqu'il est installé dans des produits hôtes particuliers qui fonctionnent dans des conditions d'exposition à des appareils portables.

The device could automatically discontinue transmission in case of absence of information to transmit, or operational failure. Note that this is not intended to prohibit transmission of control or signaling information or the use of repetitive codes where required by the technology.

- i. the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems; 4
- ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
- iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

L'appareil pourrait interrompre automatiquement la transmission en cas d'absence d'informations à transmettre ou de panne de fonctionnement. Notez que cela n'a pas pour but d'interdire la transmission d'informations de contrôle ou de signalisation ou l'utilisation de codes répétitifs lorsque la technologie l'exige.

- i. les dispositifs fonctionnant dans la bande de 5 150 à 5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux ;

- ii. pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis pour les dispositifs utilisant les bandes de 5 250 à 5 350 MHz et de 5 470 à 5 725 MHz doit être conforme à la limite de la p.i.r.e.;
- iii. pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5 725 à 5 850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée, selon le cas;
- iv. lorsqu'il y a lieu, les types d'antennes (s'il y en a plusieurs), les numéros de modèle de l'antenne et les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque

U.S.

FCC ID: S9E-140000

Federal Communication Commission (FCC) Interference Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes and modifications not expressly approved by the manufacturer or registrant of this equipment can void your authority to operate this equipment under Federal Communications Commission rules.

The radios in this device have been designed and manufactured to not exceed stipulated emission limits for exposure to radio frequency (RF) energy as required by the Federal Communications Commission of the U.S. Government 47 C.F.R. § 2.1093.

For satisfying FCC RF exposure compliance requirements, body-worn operations are restricted to belt-clips, holsters or similar accessories that have no metallic component in the assembly and must provide at least 10 mm separation between the device and the user's body. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter. The County Code Selection feature is disabled for products marketed in the US/Canada. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter. The County Code Selection feature is disabled for products marketed in the US/Canada.

CE

a. Caution:

- Risk of explosion if battery replaced by an incorrect type.
- Dispose of used batteries according to the instructions.

b. Make sure the temperature for the adapter while charging is within 0 °C to +45 °C (32 °F to 113 °F).

Limited Warranty Terms and Conditions

Product Limited Warranty

Subject to the terms and conditions set forth herein, Trimble Inc. ("Trimble") warrants that for a period of two (2) years from date of purchase this Trimble product (the "Product") will substantially conform to Trimble's publicly available specifications for the Product and that the hardware and any storage media components of the Product will be substantially free from defects in materials and workmanship.

Product Software

Product software, whether built into hardware circuitry as firmware, provided as a standalone computer software product, embedded in flash memory, or stored on magnetic or other media, is licensed solely for use with or as an integral part of the Product and is not sold. The terms of the end user license agreement, as included below, govern the use of the Product Software, including any differing limited warranty terms, exclusions and limitations, which shall control over the terms and conditions set forth in the limited Product warranty.

Warranty Remedies

If the Trimble Product fails during the warranty period for reasons covered by this limited warranty and you notify Trimble of such failure during the warranty period, Trimble will repair OR replace the nonconforming Product with new, equivalent to new, or reconditioned parts or Product, OR refund the Product purchase price paid by you, at Trimble's option, upon your return of the Product in accordance with Trimble's product return procedures then in effect.

How to Obtain Warranty Service

To obtain warranty service for the Product, it is recommended you contact your Trimble dealer. Alternatively, you may contact Trimble to request warranty service by emailing Repair_Services@Trimble.com. Please be prepared to provide:

- your name, address, and telephone numbers;
- product name, part number and serial number;
- proof of purchase;
- an explanation of the problem.

The customer service representative may need additional information from you depending on the nature of the problem.

Warranty Exclusions and Disclaimer

This Product limited warranty shall only apply in the event and to the extent that (i) the Product is properly and correctly installed, configured, interfaced, maintained, stored, and operated in accordance with Trimble's applicable operator's manual and specifications, and; (ii) the Product is not modified or misused. This Product limited warranty shall not apply to, and Trimble shall not be responsible for, defects or performance problems resulting from (i) the combination or utilization of the Product with hardware or software products, information, data, systems, interfaces, or devices not made, supplied, or specified by Trimble; (ii) the operation of the Product under any specification other than, or in addition to, Trimble's standard specifications for its products; (iii) the unauthorized installation, modification, or use of the Product; (iv) damage caused by: accident, lightning or other electrical discharge, fresh or salt water immersion or spray (outside of Product specifications); or exposure to environmental conditions for which the Product is not intended; (v) normal wear and tear on consumable parts (e.g., batteries); or (vi) cosmetic damage. Trimble does not

warrant or guarantee the results obtained through the use of the Product or Software, or that software components will operate error free.

NOTICE REGARDING PRODUCTS EQUIPPED WITH TECHNOLOGY CAPABLE OF TRACKING SATELLITE SIGNALS FROM SATELLITE BASED AUGMENTATION SYSTEMS (SBAS) (WAAS, EGNOS, GAGAN, MSAS AND LUCH), OMNISTAR, BEIDOU, GPS, GALILEO OR GLONASS SATELLITES, OR FROM IALA BEACON SOURCES: TRIMBLE IS NOT RESPONSIBLE FOR THE OPERATION OR FAILURE OF OPERATION OF ANY SATELLITE BASED POSITIONING SYSTEM OR THE AVAILABILITY OF ANY SATELLITE BASED POSITIONING SIGNALS.

THE FOREGOING LIMITED WARRANTY TERMS STATE TRIMBLE'S ENTIRE LIABILITY, AND YOUR EXCLUSIVE REMEDIES, RELATING TO THE TRIMBLE PRODUCT. EXCEPT AS OTHERWISE EXPRESSLY PROVIDED HEREIN, THE PRODUCT, AND ACCOMPANYING DOCUMENTATION AND MATERIALS ARE PROVIDED "AS-IS" AND WITHOUT EXPRESS OR IMPLIED WARRANTY OF ANY KIND, BY EITHER TRIMBLE OR ANYONE WHO HAS BEEN INVOLVED IN ITS CREATION, PRODUCTION, INSTALLATION, OR DISTRIBUTION, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT. THE STATED EXPRESS WARRANTIES ARE IN LIEU OF ALL OBLIGATIONS OR LIABILITIES ON THE PART OF TRIMBLE ARISING OUT OF, OR IN CONNECTION WITH, ANY PRODUCT. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW LIMITATIONS ON DURATION OR THE EXCLUSION OF AN IMPLIED WARRANTY, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Limitation of Liability

TRIMBLE'S ENTIRE LIABILITY UNDER ANY PROVISION HEREIN SHALL BE LIMITED TO THE AMOUNT PAID BY YOU FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL TRIMBLE OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGE WHATSOEVER UNDER ANY CIRCUMSTANCE OR LEGAL THEORY RELATING IN ANYWAY TO THE PRODUCTS, SOFTWARE AND ACCOMPANYING DOCUMENTATION AND MATERIALS, (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF DATA, OR ANY OTHER PECUNIARY LOSS), REGARDLESS OF WHETHER TRIMBLE HAS BEEN ADVISED OF THE POSSIBILITY OF ANY SUCH LOSS AND REGARDLESS OF THE COURSE OF DEALING WHICH DEVELOPS OR HAS DEVELOPED BETWEEN YOU AND TRIMBLE. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

NOTE: THE ABOVE TRIMBLE LIMITED WARRANTY PROVISIONS WILL NOT APPLY TO PRODUCTS PURCHASED IN THOSE JURISDICTIONS (E.G., MEMBER STATES OF THE EUROPEAN ECONOMIC AREA) IN WHICH PRODUCT WARRANTIES ARE THE RESPONSIBILITY OF THE LOCAL DEALER FROM WHOM THE PRODUCTS ARE ACQUIRED. IN SUCH A CASE, PLEASE CONTACT YOUR TRIMBLE DEALER FOR APPLICABLE WARRANTY INFORMATION.

Notice to Australian Purchasers - The Australian Consumer Law

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Trimble's warranty, as set out in the user manual accompanying this statement, or as described in the warranty card accompanying the Product you purchased, is in addition to any mandatory rights and remedies that you may have under the Australian Consumer Law.

Official Language

THE OFFICIAL LANGUAGE OF THESE TERMS AND CONDITIONS IS ENGLISH. IN THE EVENT OF A CONFLICT BETWEEN ENGLISH AND OTHER LANGUAGE VERSIONS, THE ENGLISH LANGUAGE SHALL CONTROL

Contents

Legal information	2
Copyright and trademarks	2
Release Notice	2
Recycling information	2
Regional compliance	3
Limited Warranty Terms and Conditions	9
Trimble TSC710 Controller	15
Registration	15
Configuration options	15
In the box	16
Replacement and spare or optional accessories	16
Parts of the TSC710 controller	18
Product specifications	19
Safety information	23
Battery safety	23
Power supply safety	24
Touchscreen glass	24
Service safety	24
Safe environments of use	24
Hearing damage	25
Distraction	25
Telecommunications & Internet Association (TIA)	25
Specific Absorption Rate (SAR)	25
Caring for your device	26
Setting up the device	28
Inserting a SIM card (optional)	28
Installing and removing the optional accessory battery pack	30
Tethering the stylus	32
Installing a screen protector	32
Attaching the pole bracket (optional)	35
Attaching the handstrap	38
Attaching an Empower module (optional)	39
Getting started: basic operation	40
Charging the device for the first time	40

Turning the device on or off, Power modes, Doze mode	41
Checking the battery charge levels and LED status	44
Charging the internal battery and the optional removable battery pack	48
Making your battery last longer	49
Using the touchscreen	52
Switching between finger, glove and stylus mode	52
Main touchscreen input gestures and functions supported on the TSC710 controller	52
Using an on-screen keyboard	53
Using the stylus	54
Using a USB or Bluetooth mouse and keyboard	54
Display settings: adjusting the backlight	54
Display settings: rotation lock	55
Using the integrated keyboard	56
Main keyboard keys	57
Configuring built-in keyboard settings	59
Keyboard status LEDs	62
Using the Android operating system	64
Using Accounts	64
The Android interface	65
Using the pre-installed Google apps and other apps	68
Getting more apps	71
Using wireless networks	72
Working with Wi-Fi networks	72
Working with mobile broadband	74
Using NFC (Near Field Communications)	75
Airplane mode	76
Working with GNSS	77
Using the compass	78
Calibrating the compass	78
Using accessories and connecting to other devices	79
Connecting to USB accessories	79
Connecting to Bluetooth accessories	81
Connecting to RS-232 peripherals	82
Transferring data between your TSC710 controller and another computer	83

Using Trimble Empower modules	84
Using the camera	86
Enable the Camera app to access your location to geo-tag photos	87
Changing camera settings	87
Troubleshooting	88
Further assistance and support with the Android operating system	88
Performance issues	88
Empower module issues	90
Wireless connectivity issues	91
Compass accuracy issues	91
Power and battery issues	92
Restarting or resetting the operating system	95
Operating system and software updates	96
Repairing your device	97

Trimble TSC710 Controller

This user guide describes how to configure and use the Trimble TSC710 controller powered by the Android™ operating system. Trimble recommends that you spend some time reading this user guide to learn about the special features of the product.

WARNING – Before you use this product, make sure that you have read and understood all safety requirements. Failure to follow these safety instructions could result in fire, electric shock, or other injury, or damage to the device and/or other property. For more information refer to [Safety information, page 23](#) of this guide.

Operating system, firmware, and BIOS downloads

Operating system updates will be downloaded automatically via the internet when they become available. A notification will display on the device prior to an updated operating system being loaded.

To download the latest firmware, BIOS, and driver packages for your device, go to mcs.trimble.com.

On the downloads portal, you will also find brief release notes and installation instructions.

Updates will also be pushed to the device and can be installed at a time to suit you using the **Systems Settings** menu.

Registration

To receive information regarding updates and new products, contact your local dealer or go to mytrimbleprotected.com. When you register your device, you can select the newsletter, upgrade, or new product information.

To register your device, you will need the serial number—a unique 12 digit number for your TSC710 controller (for example, JAJ201300096)

The serial number (along with the Regulatory label) is on a label inside the SIM card compartment on the back of the device; see [Inserting a SIM card \(optional\), page 28](#) for instructions on removing the compartment cover.

Configuration options

The TSC710 controller is powered by the Android operating system, and has a built-in alpha-numeric keyboard, integrated Wi-Fi, Bluetooth® wireless technology, and worldwide 5G LTE Cellular WWAN connectivity (data only).

For a full list of product features and their specifications, refer to [Product specifications, page 19](#), or contact your local reseller for information.

Android apps described in this user guide may be updated and changed from what is described in this user guide; refer to [Android documentation](#) for clarification.

In the box

A standard pack-out has the following items:

- A TSC710 controller
- Glass Screen Protector, and a pack containing an Isopropyl Alcohol prep pad, grey lint-free cleaning cloth, and blue lint/dust removal sticker
- 2 m (6.56 feet) USB-Type C (male) to USB-Type C (male) USB 3.0 cable for charging and data transfer
- Capacitive stylus with integrated cross-tip and flat-tip screwdrivers, tether, and 2 stylus tips
- Handstrap
- Protective soft carry case



Replacement and spare or optional accessories

WARNING – Only Trimble approved accessories should be used with this product. Failure to use Trimble approved accessories could result in fire, electric shock, or other injury, or damage to the handheld computer and/or other property. For more information refer to [Safety information, page 23](#).

A wide range of replacement and optional accessories are available to purchase for the TSC710 controller, including:

- AC power supply with regional plugs and USB-C port
- USB-C to USB-C cable for charging and data transfer
- Tempered glass screen protector
- Capacitive stylus with tether, 2 stylus tips
- Pack of 5 replacement stylus tips
- Handstrap
- Protective pouch

- TSC710 controller pole mount bracket
- Quick release pole mount clamp
- Shoulder sling
- Removeable, rechargeable accessory battery pack to double battery run-time
 - Compatible with the TSC710 controller USB-C power supply and USB-C to USB-C cable

NOTE – The accessory Li-35 battery **part number 220200 is compatible** with the TSC710 controller.

The older Li-35 battery **part number 120200 is not compatible** with the TSC710 controller. The ridge/grip design on the sides of the battery will not allow an older battery part number 120200 to be installed in the TSC710 controller.

Check the label on the battery for the part number.

Trimble Empower modules

The following Empower modules are also available:

- Trimble EM120 2.4GHz radio module
- Trimble EM130 HaLow radio
- Trimble EM450 UHF Empower Radio Module
- Trimble EM940 UHF & 900 MHz Empower Radio Module

Other modules may be available. Check with your local dealer for more information.

Parts of the TSC710 controller



1 - Ambient light sensor	14 - Speaker
2 - Android keys	15 - Trimble Empower module bays
3 - Function keys (F1 - F3, F4 - F5)	16 - Stylus holder
4 - Power / battery charging LED	17 - Trimble Empower module contacts
5 - Power key	18 - Pole mount screws
6 - Shift LED	19 - Handstrap connector points (x4)
7 - CAPS lock LED	20 - Stylus tether points
8 - LEDs left to right; Fn, Ctrl, Search	21 - Gore Vent: DO NOT COVER!
9 - Microphone (x2)	22 - Camera & camera flash
10 - OK and directional keys	23 - NFC Antenna

11 - Cursor lock LED	24 - Cover for optional battery pack & SIM card slot
12 - Function Keys (F6 - F11; F12 = Shift+F11)	25 - USB-C port, bottom of device under port cover
13 - AGr LED	

Product specifications

Physical	Size: 305.2 mm × 193.0 mm × 47.3 mm (12.0" × 7.6" × 1.6") Weight: 1270 g (2.8 lbs) excluding optional removable battery, Empower module, pole bracket and other accessories Housing: Sabic LNP D351+ BASF 1170A11U overmold
Operating System	Android 14
Processor	Qualcomm QCS6490
RAM	8 GB LPDDR4
User Storage	128 GB UFS Flash Memory
Display	7" landscape HD (1280x800 px) 215 DPI display 800 cd/m² sunlight readable LED backlight, projective capacitive multi-touch touchscreen with stylus, finger, and glove modes
Keyboard	International backlit alpha-numeric and QWERTY with Fn keys (11 physical + multiple Fn, Shift & AGr key combinations)
Notification LED	Battery status, Shift, Fn, Ctrl, AGr, Caps Lock, Search, and Cursor Lock LED indicator
I/O	USB-C for charging and USB 3.1 Gen 1 data transfer USB-PD 2.0 supports charger inputs up to 5 V, 9 V, 12 V / 3 A Display port alternate mode via USB Type-C
Battery & Power	Internal Li-Ion 4600 mAh/7.2 V nominal capacity with optional user-replaceable Li-Ion battery pack Battery run-time : RTS usage 10 hours or GNSS RTK usage 10 hours (depending on display settings, connectivity, data processing, ambient temperature, etc.) Charging Time: Full-charge 3.5 hours, 0–50 % charge in 1.5 hours If the optional removable accessory battery pack is installed (see Installing and removing the optional accessory battery pack, page 30); the total time to fully charge both internal and accessory batteries,

when in an empty state, is approximately 8 hours.

- the battery run time is approximately 19-20 hours (depending on display settings, connectivity, data processing, ambient temperature, etc.)

Power Input	5 V, 9 V, 12 V / 3 A charging, USB-PD 2.0 compliant with Type C connector
Audio	Mono speaker and dual microphones with noise-canceling technology
External speaker / microphone	USB-C or Bluetooth headsets supported
Camera	Rear camera: 16 MP auto-focus with LED flash
GNSS	Integrated Sierra Wireless EM9291 Dual Frequency L1 C/A, GPS, GLONASS, BeiDou, Galileo, QZSS 4M Horizontal RMS in favorable conditions
Bluetooth	Bluetooth 5.2, BLE 5, Class 1
Wi-Fi	Wi-Fi® 6, 2.4 GHz (802.11 b/g/n/ax) & 5.0 GHz (802.11 a/n/ac/ax)
NFC	(Near Field Communications) NFC NXP PN-7160, Reader/Writer Mode.
Mobile broadband / WWAN (optional)	5G, worldwide LTE 4G & UMTS 3G in regions where it is available AT&T and Verizon certified. NanoSIM card.
Sensors	Ambient light sensor, e-Compass, accelerometer, gyro sensor, temperature sensors, power/current sensor
Environmental Certifications	Conflict Minerals, EU RoHS 2.0, EU REACH
Safety Certifications	US/CA , EU (CB), AUS/NZ (AS/NZS), India (BIS), S. Africa,Taiwan (BSMI), UAE (UAB.S IEC60950)
EMI/EMC Certifications	CE, FCC/IC, C-Tick, BSMI
ESD Certifications	IEC 61000-4-2, Level 4, 8KV contact and 15KV air
RF Certifications	PTCRB, AT&T OTA, Verizon OTA, Wi-Fi RSE & SAR
Regional Compliance	US (FCC), Canada (ISED), EU (CE), UK (CE), Australia (C-tick, A-tick), New Zealand (C-tick, A-tick), Japan (MIC), Thailand (NBTC), South Korea (KCC), Taiwan (NCC), UAE United Arab Emirates, Mexico, Brazil (ANATEL), India, South Africa (ICASA)
Security	Secure boot with hardware fuse protection Qualcomm Trusted Execution Environment (QTEE) Device encryption Periodic Android security patches
Rugged Specifications	IEC-529: Independently tested and certified for:

- Water Ingress Protection: IPx8
- Sand & Dust Ingress Protection: IP6x

MIL-STD-810H: Independently tested and certified for:

- Operating temperature: -30 °C to +60 °C (-22 °F to +140 °F)
- Storage temperature: -40 °C to +70 °C (-40 °F to +158 °F)
- Startup temperature: -20 °C to +60 °C (-4 °F to +140 °F)
- Charging (AC adapter) temperature: 0 °C to +45 °C (+32 °F to +113 °F)
- Temperature shock: survives cycles between -30 °C and +60 °C (-22 °F and +140 °F)
- Humidity: 90% RH temp cycle +30 °C / +60 °C (+86 °F / +140 °F)
- Vibration: General Minimum Integrity and Loose Cargo Test
- High altitude (low pressure)
 - Operation 9,144 m (30,000 ft) at +5 °C (+41 °F)
 - Storage 12,192 m (40,000 ft) at -30 °C (-22 °F)
 - Rapid Decompression 2,438 m (8,000 ft) to 12,192 m (40,000 ft) in <15 seconds at +25 °C (+77 °F)
- Drop / Shock protection:
 - 26 drops (each face, edge & corner) at room temperature from 1.22 m (4 ft) onto plywood and concrete
 - 6 faces at low and high temps (-30 °C and +60 °C) (-22 °F and +140 °F)
 - Ball drop similar to IEC 60950-1, 50 mm steel ball dropped 0.5 m on touch panel only—5 drops, center and 4 corners
- Solar Radiation Exposure: MIL-STD-810H, Method 505.7, Procedures I & II. Survives prolonged solar exposure
- Salt Spray: ASTM B117 5% salt solution, 96 hrs

CAUTION – The device has an IP rating of IP68, predicated on the battery door being properly installed. If the battery door is removed, then the IP rating drops to IP54. Please be aware of the lowered rating. As such, care should be taken when opening the battery door to keep water and debris out of the enclosure.

Configuration Options: x 2 Empower module bays support:
Empower Modules

- EM120 2.4 GHz Receiver Module

- EM130 HaLow Radio Module
- EM940 UHF & 900 MHz Radio module
- EM450 UHF Radio Module
- Additional modules as they become available

**Compatible Field
Software**

Android 14 applications

[Trimble Access™](#) software version 2025.10 and later

[Trimble Siteworks Positioning System](#) version 1.80 and later

Safety information

This section contains important safety information that applies to the Trimble TSC710 controller that you have purchased. Failure to follow instructions and properly set up, use, and care for this product can increase the risk of serious injury or death, or damage the device or devices.

Battery safety

Lithium-Ion batteries are classified by the U. S. Federal Government as non-hazardous waste and are safe for disposal in the normal municipal waste stream. These batteries contain recyclable materials and are accepted for recycling. Dispose of used batteries in accordance with local regulations.

WARNING – Non-approved batteries will not function in the device. Use only the battery for the system for which it was specified. Only use the battery with a charging system that has been qualified with the system per this standard. Use of an unqualified battery or charger may present a risk of fire, explosion, leakage, or other hazard.

WARNING – There are no user-serviceable parts in the batteries. Do not disassemble or open, crush, bend or deform, puncture, or shred the battery. Do not modify or remanufacture, attempt to insert foreign objects into the battery, immerse or expose to water or other liquids, or expose to fire, explosion, or other hazard. Do not expose to temperatures above +70 °C (+158 °F).

WARNING – Improper battery use may result in a fire, explosion, or other hazard.

- Do not short circuit a battery or allow metallic or conductive objects to contact the battery terminals.
- Avoid dropping the device or battery. If dropped, especially on a hard surface, and the user suspects damage to the battery, take it to a service center for inspection.
- In the event of a battery leak, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with large amounts of water and seek medical advice.
- Battery usage by children should be supervised.

Power supply safety

WARNING – Use only AC and vehicle adapters intended for the device and have been approved for use on this device by Trimble. Other external power sources may damage your product and void the warranty.

- Ensure the input voltage on the adapter matches the voltage in your location. Ensure the adapter has prongs compatible with your outlets.
- The AC power supply is designed for indoor use only. Avoid using the AC power supply in wet areas.
- Unplug the power supply from power when not in use.
- Do not short the output connector.

Touchscreen glass

CAUTION – The touchscreen on this device is made of glass. This glass could break if the device is dropped on a hard surface or receives a significant impact. If the glass chips or cracks, do not touch or attempt to remove the broken glass. Cracked or chipped glass due to misuse or abuse is not covered under the product's limited warranty.

Service safety

WARNING – Do not attempt to take apart, open, service, or modify the product, accessories, or power supply. Doing so could present the risk of electric shock or other hazard. Any evidence of any attempt to open and/or modify this device, including any peeling, puncturing, or removal of any of the labels, will void the Limited Warranty.

Safe environments of use

WARNING – Areas with potentially explosive atmospheres are often, but not always, posted and can include fueling areas, such as below decks on boats, fuel or chemical transfer or storage facilities, or areas where the air contains chemicals or particles, such as grain dust, or metal powders. When you are in such an area, turn off your mobile device, and do not remove or install battery chargers, AC adapters, or any other accessory. In such areas, sparks can occur and cause an explosion or fire.

Hearing damage

WARNING – To prevent possible hearing damage, do not listen to high volumes for long periods.

Distraction

WARNING – Using the device in some circumstances can distract you and may cause a dangerous situation. Observe rules that prohibit or restrict the use of mobile devices (for example, avoid operating the device while driving a vehicle).

Telecommunications & Internet Association (TIA)

Hearing Aids: Some digital wireless devices may interfere with some hearing aids. In the event of such interference, you may want to consult your service provider, or call the customer service line to discuss alternatives.

Pacemakers and Other Medical Devices: The Health Industry Manufacturers Association recommends a minimum separation of six inches be maintained between a handheld wireless device and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with the independent research by and recommendations of Wireless Technology Research. Persons with pacemakers should use the ear opposite the pacemaker to minimize the potential for interference. If you have any reason to suspect that interference is taking place, turn the device OFF immediately.

If you use any other personal medical device, consult the manufacturer of your device to determine if they are adequately shielded from external RF energy. Your physician may be able to assist you in obtaining this information.

Turn the device OFF in health care facilities when any regulations posted in these areas instruct you to do so. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.

Specific Absorption Rate (SAR)

This device complies with FCC and CE standards when used as designed.

SAR is measured with this device at a separation of 10 mm to the body, while transmitting at the highest certified output power level in all frequency bands of this device. Keep this device at least 10 mm away from your body to ensure exposure levels remain at or below the as-tested levels.

Caring for your device

Cleaning

Turn off the device, and disconnect it from external power. Use a soft, dampened cloth with either water or a diluted mild detergent. If a mild detergent is used, ensure all soap residue is removed. Do not use chemical cleaners.

Touchscreen care

The TSC710 controller is extremely rugged, and is designed to withstand extreme conditions and harsh treatment, however taking proper care of the touchscreen will prolong the life and ensure optimal display performance of the touchscreen of this product. Excessive or prolonged exposure to abrasives, oil, dust, chemicals, and ultraviolet light can affect the performance of your touchscreen over time.

To help protect the screen:

- **Clean it frequently.** Use a soft, lint-free cloth to wipe the screen. You can dampen the cloth with water or an eyeglass cleaner. If the display is very dirty, it can be washed off under a gently running tap.

WARNING – Make sure that all ports and doors are fully closed, and that the device is not connected to an external power supply. Do not use chemical or abrasive cleaners.

- **Keep it covered when not in use.** Store the TSC710 controller in a carry case or pouch while you are in transit or not using it.
- **Keep it out of the sun when not in use.** Do not store the TSC710 controller in direct sunlight for a long time unnecessarily. Ultraviolet light and excessive heat from sun-loading heat can damage the display.
- **Use proper touchscreen tools.** Use either fingers or the TSC710 controller's stylus, or other devices specifically designed for use with capacitive touchscreens to operate the touchscreen of this device. The use of ballpoint pens, metal tools or other sharp objects to operate the touchscreen may scratch and/or damage the surface of the touchscreen.
- **Avoid drops, tumbles, and abrasives.** The TSC710 controller is designed to resist damage for drops up to 122 cm (4 feet). However, you should protect the display from impact, pressure, and abrasive substances that can scratch it or crack it. The device should not be dropped unnecessarily. Use the screen protectors to keep the touchscreen clean and protected, following the instructions provided on the screen protector packaging.

Battery care

CAUTION – The device has an IP rating of IP68, predicated on the battery door being properly installed. If the battery door is removed, then the IP rating drops to IP54. Please be aware of the lowered rating. As such, care should be taken when opening the battery door to keep water and debris out of the enclosure.

Use and storage temperature: Lithium-ion batteries are sensitive to high temperatures, so keep the device's batteries out of direct sun for long periods, and do not leave batteries in a hot car, especially on a dashboard in full sun or other environments where temperatures can exceed +70 °C (+158 °F). Battery life can be shortened if stored or operated outside of these temperature ranges. The batteries have a storage temperature rating of –40 °C to +70 °C (–40 °F to +158 °F), however, for maximum battery life, the recommended storage temperature is at room temperature (~+20 °C / +68 °F). When you are using the device or charging the batteries, it is normal for the device and batteries to get warm.

If the interior temperature of the device exceeds normal operating temperatures (for example, in a hot car or in direct sunlight for extended periods of time), you may experience the following as it attempts to regulate its temperature automatically:

- The device stops charging.
- If the device cannot regulate its internal temperature, it may go into a Doze state until it cools.

Move the device to a cooler location out of direct sunlight and wait a few minutes before trying to use the device again.

Charging: Recharge the battery any time; the battery does not need to be empty or low before you recharge it. However, it is best to let the battery run to below 10 percent at least once a month before you recharge it. Battery recharging is supported at temperatures between 0 °C and +45 °C (+32 °F and +113 °F). Use only the manufacturer designated charging accessories to recharge the batteries.

Other environmental conditions: The TSC710 controller is designed to work in ambient temperatures between –30 °C and +60 °C (–22 °F and +140 °F) and to be stored in temperatures between –40 °C and +70 °C (–40 °F and +158 °F). Avoid exposing the device to dramatic changes in temperature or humidity.

Setting up the device

This section tells you how to set up your TSC710 controller before you start using it.

Inserting a SIM card (optional)

Your TSC710 controller is equipped with a 5G modem. You will need a data plan and Nano SIM card from your local cellular service provider to use cellular data. If you are unsure, check with your mobile operator. See [Working with mobile broadband, page 74](#) for more information.

The TSC710 controller does not support eSIM technology.

CAUTION – Do not replace the SIM card while outdoors. Water, dust, dirt or debris may collect inside the SIM card bay causing performance issues.

CAUTION – The device has an IP rating of IP68, predicated on the battery door being properly installed. If the battery door is removed, then the IP rating drops to IP54. Please be aware of the lowered rating. As such, care should be taken when opening the battery door to keep water and debris out of the enclosure.

CAUTION – The SIM card door can be damaged if handled carelessly or if sharp tools are used to open the door. Take care not to twist or warp the door when opening or closing it.

1. If the device is on, turn it off; press-hold the **Power** key, then tap **Power Off**.
2. Using a cross-tip screwdriver or the one integrated in the stylus, loosen the 4 screws to remove the cover from the back of the device.
If [the accessory battery is installed](#), remove it to access the SIM card door.
3. Pry open the SIM card door using a coin or the tool located on the stylus tether; do not remove the door completely.

The door hinges allow for sliding the door out slightly, but the door is not intended to be completely removed.



4. Slide the SIM card into the slot in the orientation shown in the SIM enclosure.



5. Close the SIM door, making sure it clicks shut.
6. See the next section to [Install the optional accessory battery](#).
7. Replace the cover and tighten the 4 screws using the cross-tip screwdriver.

Installing and removing the optional accessory battery pack

The TSC710 controller contains an internal battery which is not removable. An optional, removable accessory battery pack is also available, which enables you to double the battery run-time.

NOTE – The accessory Li-35 battery **part number 220200 is compatible** with the TSC710 controller.

The older Li-35 battery **part number 120200 is not compatible** with the TSC710 controller. The ridge/grip design on the sides of the battery will not allow an older battery part number 120200 to be installed in the TSC710 controller.

Check the label on the battery for the part number.

You can charge the battery pack when it is installed in the device, or to decrease the total charging time, you can charge it externally.

CAUTION – The device has an IP rating of IP68, predicated on the battery door being properly installed. If the battery door is removed, then the IP rating drops to IP54. Please be aware of the lowered rating. As such, care should be taken when opening the battery door to keep water and debris out of the enclosure.

CAUTION – Water, dust, dirt or debris may collect around the battery contacts causing performance issues.

1. Using the Philips screwdriver, loosen the 4 screws to remove the battery bay cover from the back of the device.
2. Insert the battery in the battery cavity; or remove a battery by lifting it up and out.
If you are replacing the battery, make sure the replacement battery is fully charged.
3. Replace the battery bay cover and tighten the 4 screws using the Philips screwdriver.

Note that the TSC710 controller consumes power even when the device is off.



Tethering the stylus

Attach the stylus to the device to prevent accidentally dropping the stylus. The stylus is supplied with one end of the tether cord pre-looped to the stylus. You can attach the stylus to the left or the right side of the device.

To tether the stylus to the device:

1. Take the loose end of the tether cord and push it through the left or right stylus tether point.
2. Feed the stylus through the loop and pull tight.
3. Place the stylus in the stylus dock to store it when not in use.



Installing a screen protector

The TSC710 controller is fitted with a mechanically strengthened glass touchscreen which is highly resistant to abrasion and impact damage. However to ensure maximum protection and for best touchscreen operation in the rain, it is recommended that you use a Trimble-approved glass TSC710 controller screen protector.

To install a screen protector:

1. Place the device on a clean, flat surface. Make sure your hands are clean.
2. Clean the touchscreen with the supplied alcohol wipe.



3. Polish and dry the screen with the lint-free cleaning cloth supplied.



4. Remove any dust specs with the supplied dust sticker.



5. Remove the protective film from the screen protector.
6. Align the screen protector carefully with the screen and let it "drop" into the screen. If you make a mistake and it looks off-center, gently lift the screen protector up and realign it. Once the protector is on the screen, give it a soft press in the center and allow the adhesive surface to grip to the screen

naturally.



7. If there are any bubbles remaining, use the cloth provided to gently smooth them toward the edges of the screen protector.



For more information on where to purchase the correct screen protector for your device, contact your local Trimble reseller.

Attaching the pole bracket (optional)

An optional accessory for the TSC710 controller, the pole mount consists of two parts:


- a custom bracket which attaches to the back of the TSC710 controller.
- a pole clamp. This can remain on the pole and still fit in a 4" tube, and has a friction twist grip to easily adjust the angle.

The bracket is designed to stay attached to the controller semi-permanently; the controller can be comfortably carried and used in the hand even with the bracket installed.

The bracket easily plugs into the pole clamp for quick attachment and release.

To install the bracket on the TSC710 controller:

1. Remove the stylus from the holder, and place the TSC710 controller display-side down.
2. Place the bracket in the orientation shown.



3. Firmly tighten the four (4) captive screws with the Phillips screwdriver on the stylus, or use a #1 Phillips screwdriver. Do not over tighten; there is a thread-locker on the screws to prevent them from loosening.
4. Turn the TSC710 controller over, display-side up.
5. Install the metal quick release pin using the flat head portion of the stylus or a flat head screwdriver. Make sure to tighten the pin until it stops.

For right-hand configuration (shown below) install the pin on the left side of the bracket. For left-hand configuration (not shown) install the pin on the right side of the bracket.




6. On the opposite side of the bracket from the quick-release pin, install either the stylus holder or the




end cap. Use the flat head portion of the stylus, or a flat head screwdriver. For the stylus holder, adjust the position to the desired angle.

To install the pole clamp:


1. Unclamp and open the cam locks.

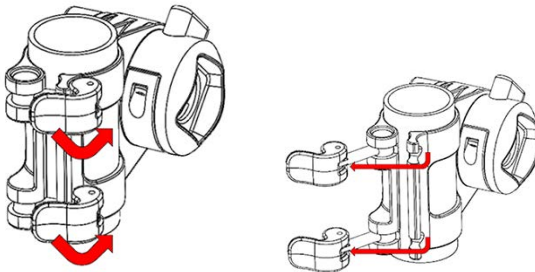


2. Remove the cardboard tube (if applicable).

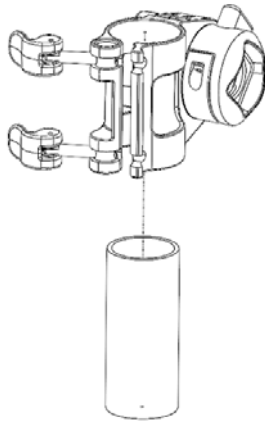

3. With the quick-release button facing up on the far side of the pole, pull the bracket toward you to snap it over the pole.

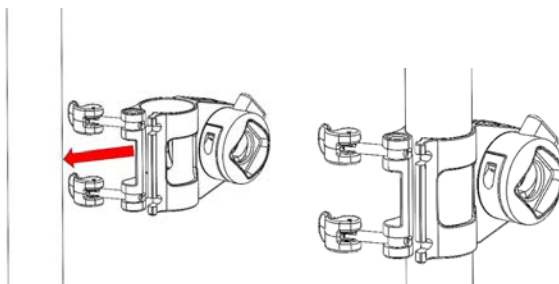


4. Position the pole mount (vertically and axially) on the pole where desired.
5. To lock in place, fold over the cam arms and engage the cam clamps.

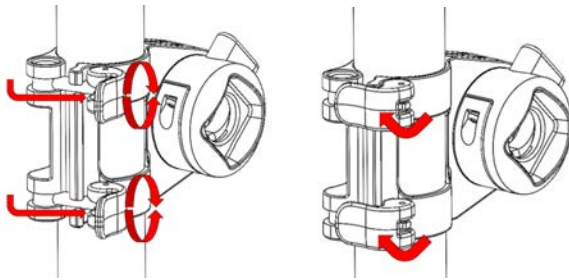

To adjust for variations in pole diameter, turn the cam lock screws (right turn to tighten and left turn to loosen) so that the cam is resting against the stop surface, before engaging the cams.

To attach the TSC710 controller to the pole:

1. Push and hold down the quick release button on the pole mount.



2. Install the quick-release pin side of bracket into the pole mount, and release the quick-release button.



3. Loosen the rotation lock handle to adjust the viewing angle of the TSC710 controller, then tighten (right to tighten, left to loosen).



To release the TSC710 controller, push the button and pull the device out of the clamp.

Attaching the handstrap

Attach the handstrap to the left or the right side of the device, according to your personal preference. To ensure a good fit:

1. Thread one end of the handstrap ribbon through the top handstrap slot; thread from the center of the device toward the top of the device.
2. Pull the end of the ribbon back towards the center of the handstrap and feed it up, over, and down through the lock buckle on the handstrap and pull it tight.
3. Thread the ribbon at the other end of the handstrap through the bottom handstrap slot; thread from the center of the device toward the bottom of the device.

Pull the end of the ribbon back towards the center of the handstrap and feed it up, over, and down through the lock buckle on the handstrap and pull it as tight as is comfortable for your hand.

If required, use a small blunt tool to push the ribbons through the handstrap slots on the device. Do not use a sharp tool.

When using the handstrap, the device should sit firmly in the hand.



Attaching an Empower module (optional)

Before you install or remove a module from the device, make sure the device is powered off or in Doze state. For more information, see [Turning the device on or off](#), [Power modes](#), [Doze mode](#), [page 41](#).

You need to re-calibrate the compass after installing or removing an Empower module. For more information, see [Using the compass](#), [page 78](#).

To attach an Empower module to the TSC710 controller:

1. Hook the Empower module onto the back of the device, ensuring that the slots on the top of the device line up with those on the Empower module.
2. Using the Phillips #1 screwdriver, tighten the 2 captive screws at the bottom of the Empower module to secure the module in place. Do not overtighten the screws.



Getting started: basic operation

This section explains some basic features to get you started using the TSC710 controller.

When you start your device for the first time, the Android operating system takes you through some basic setup steps; follow the instructions on the screen.

For more details on setting up and using the Android operating system, see [Using the Android operating system, page 64](#) or go to the [Android website](#).

Charging the device for the first time

All current devices shipped by Trimble are shipped in Shelf mode; the device must be connected with a USB cable and a power adapter into an electrical outlet before the device can be turned on. See [About Shelf mode, page 41](#) for more information.

The internal battery is charged using the USB-C port directly on the bottom of the device. It takes approximately 3.5 hours to fully charge the device's internal battery from an empty state using the AC adapter and USB-C to USB-C cable included in the packout. If the [optional removable accessory battery pack is installed](#), it can also be charged while in the device; the total time to fully charge both internal and accessory batteries, when in an empty state, is approximately 8 hours.

NOTE – The accessory Li-35 battery **part number 220200 is compatible** with the TSC710 controller.

The older Li-35 battery **part number 120200 is not compatible** with the TSC710 controller. The ridge/grip design on the sides of the battery will not allow an older battery part number 120200 to be installed in the TSC710 controller.

Check the label on the battery for the part number.

NOTE – It may take longer to charge the batteries if you use third party AC adapters, or PC \ laptop USB Ports.

1. Connect the appropriate international plug adapter for your region to the AC adapter.
2. Connect one end of the USB-C to USB-C cable to the USB-C port located on the AC adaptor.
3. Connect the other end of the USB-C cable to the USB-C port on the TSC710 controller.
4. Plug the power supply into an electrical outlet and charge for 3.5 hours (internal battery only), or 8 hours if the optional removable battery is also installed.



About Shelf mode

Shelf mode is a low power mode and is useful when shipping the device or for long term storage. Shelf Mode puts the device into a fully shutdown mode and the batteries into a minimal power state configuration. This mode maximizes the power retention of the batteries ensuring a charge over a long period of time.

All current devices and removable batteries shipped by Trimble are shipped in Shelf mode. This means that the device or the charger that the battery is placed in must be connected with a USB cable and a power adapter into an electrical outlet to return the battery to normal operation.

To power on from Shelf mode, a power cable must be attached to the TSC710 controller and plugged into a power source. The optional removable battery can also be woken up by directly plugging it into a power supply using the USB-C cable.

To place the device in Shelf mode, Go to **Settings / Battery / Shelf Mode Enable**, and select **OK**.

Alternatively, press-hold the **Power** key for one (1) second to open the **Power** menu, where there is the option to place the device in Shelf mode; when selected, the device will shut down.

NOTE – If the [optional removable accessory battery pack is installed](#), when you put the device into Shelf mode, the battery pack is also put into the low power Shelf mode.

Turning the device on or off, Power modes, Doze mode

NOTE – If the device is in **Shelf mode**, the device must be connected with a USB cable and a power adapter into a live power source such as a wall socket or mains power before it can be powered on. See [About Shelf mode, page 41](#).

Turning the TSC710 controller on

To turn on the TSC710 controller, press-hold the Power key for about 4 seconds. The **Powered by Android** boot screen appears.

The first time you turn on the device, the Android operating system takes you through some basic setup steps; follow the instructions on the screen.

Once your device has been set up, if you have set a PIN, password, or pattern to unlock the device, swipe up on the touchscreen to enter it.

Power key functions

- **If the TSC710 controller is off:**
 - with no external USB power supply connected:
 - a short Power key press turns on the charge LED (while the button is pressed) but does not start the operating system.
 - a long Power key press (about 4 seconds) turns on the device and starts the operating system. The **Powered by Android** boot screen appears.
 - with an external USB power supply connected (charge-only mode):
 - a short Power key press displays the battery level and charging animation but does not start the operating system.
 - a long Power key press (about 4 seconds) turns on the device and starts the operating system. The **Powered by Android** boot screen appears.
- **If the TSC710 controller is on** (the operating system is running) **and the TSC710 controller's display is on:**
 - a short Power key press turns the display off; the device goes into Doze mode. See [About Doze mode, page 43](#) below.
 - a Power key press of about 1 second opens the **Power** menu.
- **If the TSC710 controller is on** (the operating system is running) **but the TSC710 controller's display is off**, a short Power key press turns on the display.
- An extra-long Power key press (15 to 25 seconds) forces the device to turn off, no matter what state it is in (even if the operating system has become unresponsive.) When you press-hold the Power key,



the charge LED lights up green. After 15 to 20 seconds the charge LED briefly turns off then on again indicating that the power has been turned off. You should be able to start the device with the normal 4-second Power key press.

NOTE – If you do not release the Power key soon after the LED off / on cycle, you will likely trigger the operating system to start so the device will not stay in the Off state.

About Doze mode

If you have not interacted with the TSC710 controller for one minute (default setting), the screen turns off and the device goes into a power-saving Doze mode. Doze reduces battery consumption by deferring background CPU and network activity for apps when the device is not in use. The device exits Doze mode and resumes normal activity as soon as the Power key is pressed or when connected to a charger.

- To manually put your device in Doze mode, briefly press the **Power** key.
- To wake up your device from Doze mode, briefly press the **Power** key. Depending on your security settings, your device may be locked. To unlock it, swipe up on the screen then enter your PIN, password, or pattern if required
- To set the screen turn-off time, go to **Settings / Display / Screen timeout**, and select your preferred duration.

Turning the TSC710 controller off

Power Off mode shuts down the TSC710 controller completely. Minimal processes still work such as maintaining date and time. To power off the device, do one of the following:

- press-hold the **Power** key until the **Power** menu appears, then tap **Power Off**.
- swipe down twice from the top of the screen, then tap the **Power** icon in the bottom right corner of the screen. On the **Power** menu tap **Power Off**.

TIP – Tap-hold the **Power Off** option to open the **Reboot to safe mode** confirmation dialog. Safe mode restart will boot into a minimal configuration to help diagnose potential driver or configuration problems.

Restarting / rebooting the device

If you need to reboot the device, press-hold the **Power** key until the **Power** menu appears, then tap **Restart**. **Restart** will reboot the system by powering off momentarily and then immediately powering back up and rebooting.

Checking the battery charge levels and LED status

The TSC710 controller is powered by internal battery which are not removable, and an optional, [removable accessory battery pack](#) which enables you to double the battery run-time.

If you are using the optional removable accessory battery pack, you can charge it while installed in the device, or externally using its USB-C port from a computer or from a USB charger.

When charging, the internal battery is charged first; the removable battery will start to charge once the internal battery is fully charged.

LED charging status

An LED on the keyboard (above the **Power** key) shows the charging status. The charging LED applies to the internal non-removable battery and the optional removable battery pack.

-  Green: fully charged.
-  Amber: charging normally.
-  Red: battery charging error. It can take the device approximately 30 seconds to recognize a bad battery and indicate a charging error.

The device is configured to use the removable battery first then switch to the internal battery once the removable battery charge level drops to about 3%.

When the internal battery charge drops close to 0, the device will shut down.



Checking the charge level of the internal battery and the accessory removable battery pack

You can check the charge level of the internal and the removable accessory battery (part number 220200, if installed) from the **Status** bar (top right corner of the screen).

If there is no accessory removable battery in the device, only one battery icon is shown. If an [accessory removable battery is installed](#) correctly, a second battery icon with a small circle in its lower right corner is also shown:

If **Battery percentage** is turned on, each battery icon also shows the battery charge level on the **Status** bar as a percentage.


See [Using the Battery settings, page 45](#) for more information on turning on **Battery percentage**.



To access the detailed battery charge information for the internal battery and the accessory removable battery pack, swipe down from the top of the display twice to show all **Quick Settings** options, tap the **Settings** icon in the bottom right corner, then tap **Battery**. See [Using the Battery settings, page 45](#) for more information.

Using the Battery settings

To access **Settings**, swipe down from the top of the display twice to show all **Quick Settings** options, tap the **Settings** icon in the bottom right corner, then tap **Battery**. Under **Battery**, the combined percentage charge of the internal battery and the accessory removable battery is displayed:

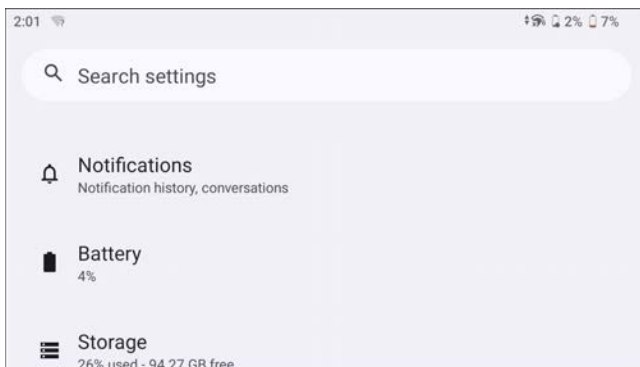


In the image above, at the top of the screen, the removable battery shows a 2% charge and the internal battery shows a 7% charge. There is therefore a 4% combined total charge available.

A fully charged internal battery will run on average for approximately 10 hours (depending on workflow). A fully charged accessory removable battery provides an additional 10 hours of battery run-time. If the combined charge is 37%, this means that there is 37% available run-time from the combined estimated total battery run-time of 20 hours; that is, 37% would yield approximately 7.4 hours of typical run-time.


To access the **Battery settings**, tap **Battery**. The **Battery settings** screen shows the combined charge level of the internal and the accessory removable batteries and their charging status.

As on the **Status** bar, the battery icons are filled according to their charge level. For example:

- the **Battery settings** screen below is showing (top right of the screen) 2% charge for the accessory removable battery and 53% charge for the internal battery, with a combined total charge of 27%:

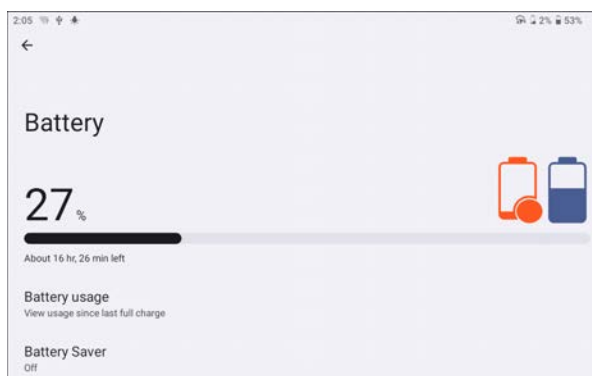

- the **Battery settings** screen below is showing no accessory removable battery, and 54% charge for the internal battery:

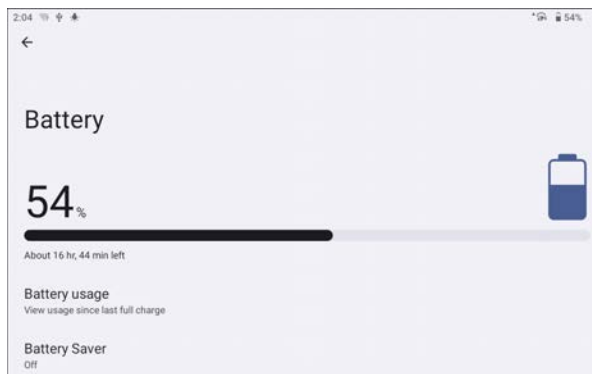


Scroll down to access other settings:

- Battery usage**
- Battery Saver**
- Adaptive Battery**
- Battery percentage:** Turn on to display the battery charge % level next to the battery icons on the **Status** bar for the internal battery and the accessory battery. This setting is off by default. When turned on, the Battery settings will still show the combined % charge of both the internal and the accessory batteries.
- Internal Battery**
- Shelf mode enabled.** This option will turn on [Shelf Mode](#) for the internal battery and the removable battery if it is installed.


Battery charging

- The internal battery always charges first to 100%. Charging then switches to the accessory removable battery.
- A lightning bolt displays on the battery icon while that battery is charging.
- The accessory removable battery is always used first until drained to 0%; the device then switches to using the internal battery.
- Under **Battery**, the charge percentage and charge status, including time remaining to full charge, is displayed.


NOTE – The "time remaining to full" value is for the battery which is currently charging; that is, when you have a removable battery installed in the device with a low charge, this value might be low as the internal battery is charging and is almost fully charged, but will then switch to a high value when charging switches to the removable battery with a low charge.

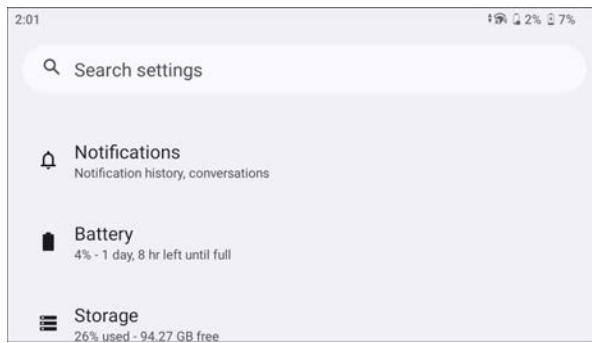

- The following image shows that the internal battery is charging, as indicated by the lightning bolt on the internal battery icon. This same icon shows on the **Status** bar in the **Battery settings** and on the device's home screen.

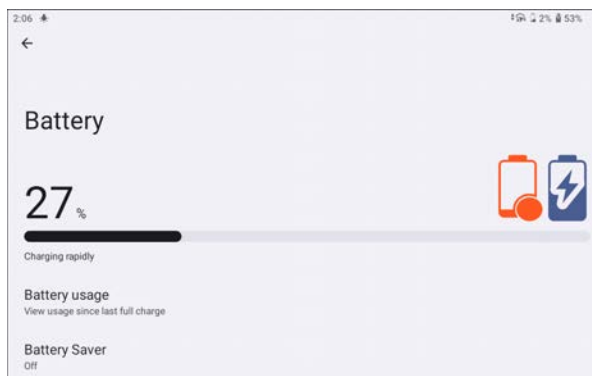

- When the internal battery is 100% charged, the accessory removable battery starts charging. The lightning bolt appears on the removable battery icon:

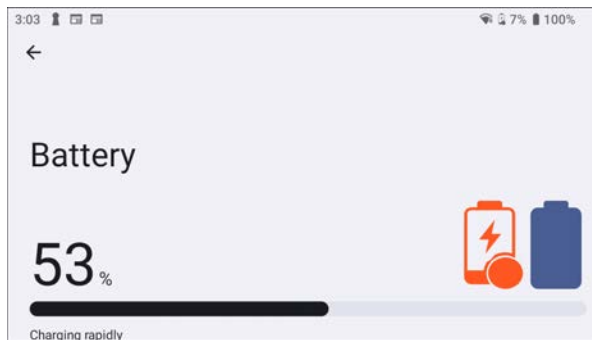


- When both batteries are 100% charged, both battery icons show as full.


Accessory removable battery: external battery error indicator

If a fault is detected in the accessory removable battery, the accessory removable battery icon alerts you in the **Status** bar, under **Settings**, and in the **Battery** settings.

- in the **Status** bar:

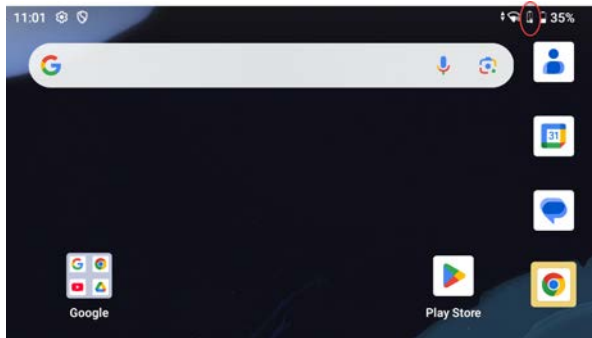

- in the **Battery** settings:

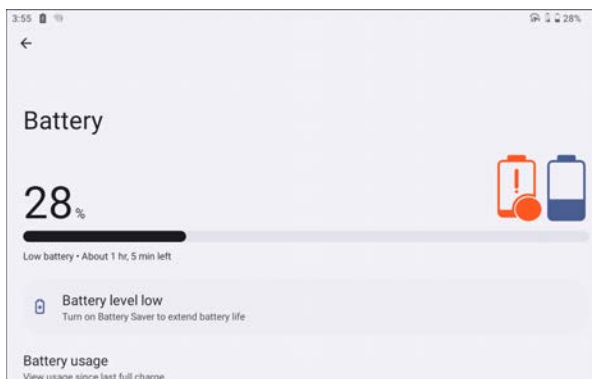

Charging the internal battery and the optional removable battery pack

The internal battery is charged using the USB-C port directly on the bottom of the device. If you have the [accessory removable battery pack installed](#), it is also charged through the USB-C port.

1. Connect the appropriate international plug adapter for your region to the AC adapter.
2. Connect one end of the USB-C to USB-C cable to the USB-C port located on the AC adaptor.
3. Connect the other end of the USB-C cable to the USB-C port on the TSC710 controller .

4. Plug the power supply into an electrical outlet.



The internal battery will charge first. When the internal battery is fully charged, the optional removable accessory battery pack, if installed, will charge.

It may take longer to charge the batteries if you are using your device for power-intensive activities, for example using GNSS or processing a lot of data while you are charging it.

You can also charge the removable battery when it is not in the device, using the USB-C cable, the appropriate international plug adapter for your region connected to the AC adapter, and plugged into an electrical outlet.

Making your battery last longer

The Android operating system includes a number of features to help you get the maximum run time out of your battery. Here are some practical suggestions that you can do to maximize the operating time of the battery:

- **Use Battery Saver mode** to help the device's battery last longer when it is running low. This mode turns off or restricts background activity, some visual effects and other high-power features to extend battery life. To turn on **Battery Saver** mode:
 - a. Swipe down from the top of the screen to access **Quick Settings**.
 - b. Tap **Battery Saver**, then tap **Turn On**.

When **Battery Saver** mode is on, the battery icon in the **Status** bar is red.

NOTE – The **Battery Saver Quick Settings** button may not be on the first **Home** screen, so swipe left to access it.

NOTE – Battery Saver turns off automatically when your device is charging.

NOTE – Battery Saver does not stop position data coming through from location services.

- **Keep Battery optimization on.** To have apps use your device's battery only when they need to, keep **Battery optimization** on for all apps. **Battery optimization** is on by default. You can also set **Battery optimization** on individual applications.

To specify battery optimization for any apps, go to **Settings / Battery / Battery usage**. Tap on any app in the list to view options.

NOTE – If you haven't had any apps running, no apps will be listed here.

Under **MANAGE BATTERY USAGE**, you can view or select **Background restriction** and **Battery optimization**.

- **Background restriction.** To save battery charge, tap **Background restriction** and then select **RESTRICT**. This stops the app from using battery charge in the background. Note that this may cause apps to work improperly and cause delayed notifications.
- **Battery optimization.** Most apps will have the **Optimizing battery use** setting enabled by default. Tap this option to view apps that are not optimized. Select **All apps** from the dropdown next to **NOT OPTIMIZED** to view all apps. Select an app from the list to turn **Battery optimization** on or off. Turning off is not recommended, as it may drain the battery more quickly as the app will no longer be restricted from using background battery.
- **Stretch a low battery's power.** To help a dying battery last until you can charge it, first turn on **Battery saver** mode. Often, battery saver is all you'll need for a low battery's power to last until you can get to a charger. Stretch your remaining battery power with temporary changes to your settings/usage.

TIP – Turn the features back on when you have charged the battery.

- **Avoid high-drain activities;** for example, heavy screen use, heavy data processing.
- **Turn off the wireless radios** when not using them to limit connectivity; for example, turn on Airplane mode, turn off Bluetooth. See [Using wireless networks, page 72](#).
- **Limit location data;** for example, turn on GPS battery saving mode, turn off Location services.
- **Limit automatic syncing;** for example, turn off auto-sync for your Google account, turn off auto-sync for certain Google apps.
- **Unplug USB devices.** Many USB devices use power just by being connected. If you use a USB flash drive, unplug it when you are not using it.
- **Turn off Empower modules** if you will not be using them for a prolonged period; see [Powering modules in the Empower Hub, page 85](#).
- **Decrease the display brightness** to the lowest comfortable level. See [Display settings: adjusting the backlight, page 54](#) for more information.
- **Turn off screen rotation.** See [Display settings: rotation lock, page 55](#) for more information.

- If you don't work in low light settings, **disable the keypad backlight**. Go to **Settings / System / Languages & input / Physical keyboard / Built-in Keyboard**. Tap the slider next to **Enable** to disable the keyboard backlight.

You can also adjust the brightness of the keyboard backlight by moving the **Backlight brightness** slider left or right.

- **Turn off the device** when you are not using it. See [Turning the device on or off, Power modes, Doze mode, page 41](#).
- **Reduce the length of time before the operating system turns off the display**. To further save battery power, ensure the device settings are configured to turn off the screen when you haven't used it for a length of time. See [Turning the device on or off, Power modes, Doze mode, page 41](#).

Using the touchscreen

Your TSC710 controller can be easily operated with the touchscreen (using your fingers, a stylus, or a glove), a mouse, an onscreen keypad, or the full built-in keyboard. You can easily switch between any of these input methods.

When using the device in the rain, Trimble recommends that you use Finger mode, with a screen protector installed. The stylus does not work in the rain.

Switching between finger, glove and stylus mode





To select or switch between Finger, Glove, and Stylus mode:

1. Swipe down from the top of the screen to access **Quick Settings**.
2. Tap the **Touch Mode** Quick Setting to cycle through Finger mode, Glove mode, or Stylus mode.

Main touchscreen input gestures and functions supported on the TSC710 controller

The table below describes the main touchscreen input gestures and functions supported on this device.

Tap 	Tap once on something.	Opens/executes the action of what you tap on. To enter text, tap where you want to type. If you have enabled an onscreen keypad, it will display. By default, entering text is done using the physical keyboard.
Press- hold 	Press-hold your finger or the stylus down for a few seconds.	Shows a menu with options related to what you're doing (like right-clicking with a mouse). On the pop-up menu that appears, tap the action you want to perform.
Double-tap 	Double-tap on something.	Tap quickly twice on a webpage, map, or other screen to zoom. Double-tapping after pinching to zoom in some apps, such as Browser, reflows a column of text to fit the width of the screen.

Slide / swipe 	Slide / swipe your finger or the stylus on the screen.	Scrolls through what's on the screen. Quickly move your finger on the surface of the screen, without pausing when you first touch it, to scroll a page or a list up or down. Scrolls vertically or horizontally. Swipe a Home screen left or right to see your other Home screens.
Drag 	Drag your finger or the stylus on the screen.	Hold your finger or the stylus on an item for a moment and then, without lifting your finger/the stylus, drag on the screen until you reach the target position. • Drag in a list to select multiple items. • Drag items on the screen to reposition them.
Pinch / stretch 	Pinch your thumb and forefinger together or move them apart.	Zooms in or out of a website, map, or picture.
Rotate 	Put two or more fingers on an item and then turn your hand.	Rotate the screen left or right in apps that support it, such as Maps.
Swipe left or right 	Swipe left or right on the screen.	Swiping to the right opens Google search. Swiping to the left opens other Home screens.
Swipe from top 	Swipe down from the top of the screen	Swipe down once to Quick Settings. To show more settings, swipe down a second time to expand the Quick Settings panel, and swipe the expanded Quick Settings to the left to show additional settings. Swipe up to close Quick Settings.

Using an on-screen keyboard

You can type on the device using an on-screen keyboard, i.e on the touchscreen. The on-screen keyboard is disabled by default. To turn it on:

1. Go to **Settings / System / Keyboard / On-screen keyboard**.
2. Tap **Gboard**, then under **Languages** make sure the type of keyboard you want (e.g. QWERTY, English (US)) is selected.
3. Tap the **Gboard** slider to toggle the on-screen keyboard on.

When you tap in a text field on the screen, the on-screen keyboard will appear.

To access the on-screen keyboard, tap in a text field, or tap the on-screen keyboard icon in the taskbar. To hide the on-screen keyboard, tap anywhere out of the text field, or tap the on-screen keyboard icon again.

You can still use the physical keyboard while the on-screen keyboard setting is on.

NOTE – Not all applications respond to the on-screen keyboard settings.

Using the stylus

NOTE – Trimble recommends that you use the Trimble TSC710 controller stylus accessory. There are many other capacitive touch styli available that will work with the TSC710 controller as long as they have a rubber tip; however the stylus available as an accessory is tuned for the TSC710 controller display and it fits into the stylus holder. Trimble offers no guarantee that other styli will work.

Take notes, draw, navigate, and mark up documents in your apps using the stylus that comes with your device.

To make a selection, tap the screen once on the item you want to select.

To display a right-click menu, tap and hold an item on the screen, then tap the required menu item.

CAUTION – The stylus does not work in the rain.

Using a USB or Bluetooth mouse and keyboard

You can attach a physical keyboard, mouse and other peripherals to your device via USB or Bluetooth wireless technology. For more information see [Using accessories and connecting to other devices, page 79](#).

Display settings: adjusting the backlight

The TSC710 controller is equipped with a high brightness outdoor readable display. You can easily increase the brightness of the display to increase the readability of the device in bright sunlight conditions, or turn down the brightness to help conserve battery power when working indoors or in dim conditions. You can also have the device automatically adjust the backlight power depending on the ambient light conditions.

Configuring Adaptive brightness

Adaptive brightness is on by default. It uses the ambient light sensor on the device's screen (see [Parts of the TSC710 controller, page 18](#)) to adjust your screen brightness depending on the amount of light around you.

To adjust the backlight settings, and turn Adaptive brightness off / on:

1. Open the **Settings** app.
2. Tap **Display**.
3. Tap the setting that you want to change.

Manually adjusting the backlight brightness

1. Swipe down twice from the **Status Bar** at the top edge of the screen to view the **Quick Settings** bar.
2. Slide the backlight slider left or right to adjust the brightness.

Display settings: rotation lock

The TSC710 controller is equipped with orientation sensors that can detect if your device is in portrait or landscape orientation. The operating system can automatically adjust the display to match your device orientation.

If Auto-rotate is on, the TSC710 controller is constantly monitoring the orientation of the device, and therefore uses more power. Trimble recommends leaving Auto-rotate off unless you have a specific need for it to be on.

1. Swipe down from the top of the screen to display **Quick Settings**.
2. Tap the Auto-rotate **Quick Settings** tile to toggle auto-rotate on or off.

Using the integrated keyboard

The TSC710 controller has a full built-in QWERTY keyboard. The keyboard is similar in most ways to a standard PC keyboard; there are some differences due to the keyboard's small physical size, and some special features have been added to support users' specific requirements.

This section covers how to use the keyboard, and describes the special / non-standard functionality of the keyboard and the associated utilities.

The keyboard controller manages the [sticky key operation of all modifier keys](#).

Main keyboard keys



1	◀ Android Back key
2	● Android Home key
3	■ Android Menu key
4	App Menu: App-specific, this launches the menu for the active app; it performs the same function as the  menu key that most apps have (giving options for help, about, exit, etc.). It is supported in Trimble Access, but for 3rd party apps it may not do anything.
5	Function keys F1-F12 These can be configured in the Trimble software according to your requirements. Refer to the Trimble software documentation.
6	Numeric Keypad, Numeric Keypad Enter key, and Cursor Lock / Num Lock key: The Numeric Keypad is locked to Num Lock by default; the 0 to 9, decimal point ('.') and the Cursor Lock / Num Lock key.

	and minus ('-') keys perform the same as the numeric keyboard on a standard PC keyboard. - The Numeric Keypad Enter key performs the same as the numeric keyboard Enter key on a standard PC keyboard. Cursor Lock / Num Lock key. By default, the numeric keypad is locked in Num Lock (the LED status icon above the key is OFF). To turn off Num lock and turn on Cursor lock, press the yellow Fn key (10) and press the . key (the decimal point) to change the numeric keypad to a Cursor Navigation state. In Cursor Navigation state, the keys function according to the "key+Shift" behavior (Home; End; Page up; Page Down; left, right, up, or down arrow; Insert; and Delete.) When in Cursor Navigation state, the LED status icon above the key is ON (green).
7	Volume keys: Use to adjust the device's speaker volume. - use the keyboard keys Fn+8 = Volume up, Fn+5 = Volume down, or use the volume slider that appears on the side of the screen to adjust the Media volume when you press Fn+8 or Fn+5. - To control other sounds (Call volume, Ring volume, Notifications, Alarms) tap ... below the Volume slider to access the Sound settings.
8	Print Screen (Fn+0). Capture a screenshot of what is currently visible on the screen. Screenshots are saved to the Files / Images / Screenshots folder and can also be accessed under Photos / Screenshots.
9	Modifier Keys: Fn, Shift , Ctrl, and AGr Modifier keys are keys that modify the action taken when other keys are pressed while the modifier key is held down or are in sticky mode. Modifier keys can be used in combinations with more than one key pressed at the same time. To make the keyboard easier to use, the modifier keys can be configured as sticky keys. When sticky keys are enabled the modifier keys "stick down" when pressed so that you do not need to press-hold a modifier key while you press the other key. See Modifier keys and Sticky keys: modes and settings, page 60 for more information. The Search key () is used as a non-modifier key to open the Android Search function. The Search key can be made into a Sticky key using the settings; see Modifier keys and Sticky keys: modes and settings, page 60 for more information. When pressed and held, or when in Sticky mode, the Search key is a modifier key that allows access to various keyboard shortcut options. For example, press and hold the Sticky key and then press the E key to open your primary email application. To see a list of Search key modifier shortcuts, press Search + /. A list will be displayed.

10	Fn Key (Function Select key). Use the Fn key to access a key's alternate function, as printed above the key in yellow. • If sticky keys are not enabled, press-hold the Fn key and press the other required key. • If sticky keys are enabled you do not need to hold the Fn key while pressing the other key. See Modifier keys and Sticky keys: modes and settings, page 60 for more information.
11	Caps Lock = Fn+Z: locks the keyboard alphabetic keys to capital letters. The Caps LED will illuminate when Caps Lock is on.
12	Power key. Turn the screen on / off. Press-hold the Power key for a couple of seconds to quickly access settings to power off or restart the device, or place the device into Shelf mode (see Turning the device on or off, Power modes, Doze mode, page 41).
13	Screen Lock = Fn+1. Use to temporarily disable the touchscreen. Press Fn+1 again to unlock the touchscreen. In this mode Quick Settings are still accessible, and you can still operate the active application using the keyboard. TIP – You can also use the Power key to place the device in Doze mode to clean the display; press the Power key briefly. Press the Power key again to wake up the device.
14	Screen Display Brightness: Adjust the display's backlight brightness: • Fn+7 = brighter • Fn+4 = dimmer You can also set the display brightness to adjust automatically when the ambient lighting conditions change. See Display settings: adjusting the backlight, page 54.
15	Back Tab key. The back tab key performs the same function as pressing the Shift key and the Tab key. For many applications this will move the focus to the previous control in the sequence, as opposed to the Tab key which moves the focus to the next control. For applications that use the Tab key for text entry, the Back Tab key typically performs the same as the Tab key.

Configuring built-in keyboard settings

You can configure some keyboard behaviors under **Settings / System / Keyboard / Physical keyboard / Built-in Keyboard**.

Use the Built-in Keyboard settings to check settings or make changes to some of the built-in keyboard behavior. Use the Android toggle to Enable/Turn On (slide to the right) or Disable/Turn Off (slide to the left). Details for each setting are covered below.

Built-in keyboard backlight

The built-in keyboard is equipped with a backlight that makes it easier to use in dimly lit areas. The backlight is activated when you press a key; it stays on for a while and then turns off to conserve power. You can manually turn off the backlight or adjust its brightness.

To edit the backlight behaviors, go to **Settings / System / Keyboard / Physical keyboard / Built-in Keyboard / Backlight** and configure as required:

- **Enable.** This is On by default. If you don't work in low light settings, turn Off to completely disable the backlight and save battery power.
- **Timeout .** Set the Timeout value to determine how long the backlight stays on when no keys are pressed.
- **Automatic Mode.** When set to:
 - Off, the backlight is always enabled . This is the default setting.
 - On, the device's ambient light sensor is used to keep the backlight from turning on in well lit areas.
- **Backlight brightness.** Move the slider to adjust the brightness of the backlight (right = brighter, left = dimmer). Brighter settings consume more power than dimmer settings.

Modifier keys and Sticky keys: modes and settings

Use Modifier keys to modify the action of another pressed key, while you press-hold the modifier key. Modifier keys can be used in combinations, with more than one modifier key pressed at the same time.

The modifier keys are:

- the **Fn** key
- the **Shift** () key
- the **Ctrl** key
- the **AGr** key
- the **Search** ()key

Since the device is normally hand-held, it can be difficult to press multiple keys on the built-in keyboard at the same time. To make the keyboard easier to use, you can set the modifier keys to be Sticky keys.

NOTE – You can also set the **Search** key  to be a Sticky key.

When Sticky keys are enabled, the modifier keys “stick down” when pressed so that you do not need to press-hold a modifier key while you press the other key(s), allowing multiple key combinations to be pressed sequentially.

To configure Modifier / Sticky key behavior, go to **Settings / System / Keyboard / Physical keyboard / Built-in Keyboard / Sticky Keys**. If Sticky key behavior is off, move the **Sticky modifier keys** slider to the right to turn on Sticky key behavior.

- **On** (default) = Sticky key behavior is enabled. Modifier keys “stick down” when pressed, and they stay active until you press a non-modifier key. The associated LED will come on when the key is pressed.
- **Off** = Sticky key behavior is disabled. To access modified key functions, you must press-hold the required Modifier key and then press the other key you want. E.g. press-hold **Shift** then press an alpha key to access the capital letter.

The different Sticky key modes / settings and behavior of the modifier keys when Sticky key behavior is enabled is described below.

- **Search key:** the Search key is used as a non-modifier key to open the Android Assistant function. You can make it Sticky by turning this option On.
 - **Off (default):** Search key is not a sticky key. Because the Search key is sometimes used in a non-modifier fashion this control allows the Search key to not be sticky while the other keys remain sticky.
 - **On:** Search key is a sticky key.
- **Lock modifier keys:** The modifier keys can be locked on (or pressed) when pressed twice in quick succession. You can set a modifier key to be locked down indefinitely by turning this setting On; when you then press a modifier key twice, it locks down until you press the key a third time.
 - **Off (default):** Modifier keys are released when pressed twice in quick succession. Normal Sticky keys mode: Temporarily latch modifier key when pressed. Pressing and releasing a modifier key one time latches the modifier key state down until a non-modifier key is pressed at which point the modifier key is released.
 - **On:** Modifier keys are locked down when pressed twice in quick succession (press a third time to release). Pressing and releasing a modifier key one time latches the modifier key state down until another non-modifier key is pressed at which point the modifier key is released. Pressing and releasing a modifier key twice in quick succession locks the modifier key state down until it is pressed and released a third time.
- **Play sounds.** When modifier keys are pressed or released a sound will be played to make it easier to determine the locked state of the modifier keys.
 - **Off (default):** No sound when sticky keys are pressed or released.
 - **On:** Play a sound when a modifier key is latched down, locked down, or sticky keys are pressed or released.

To assign different keys to be Modifier keys if required, go to **Settings / System / Keyboard / Physical keyboard / Modifier Keys**. Tap the Modifier key and assign the key you want to assign to the selected function then tap **Done**,

Keyboard status LEDs

There are eight LEDs on the keyboard, including five Modifier / Sticky key LEDs. The Sticky key LEDs represent the sticky state of the Modifier key it is located above.

- If the Sticky key setting is Off, then the LED will momentarily display for as long as the key is held down.
- If the Sticky key setting is On, then the LED will illuminate when the key is pressed and released and will stay on until another key is pressed.

See [Modifier keys and Sticky keys: modes and settings, page 60](#) for more information.



The different LED states are:

	No LEDs On	None of the Modifier keys are set as "sticky".
1	Battery Charging LED	See Checking the battery charge levels and LED status, page 44
2	Caps Lock LED	ON: Caps locked. OFF (Default): Caps unlocked.
3	Shift key LED	ON= the Shift key is set as "sticky".
4	Modifier keys & LEDs	Fn, Ctrl, Search, AGr • Fn key LED ON= the Fn key is set as "sticky". • Ctrl key LED ON = the Ctrl key is set as "sticky". • Search key LED ON= the Search key is set as "sticky".

		• AGr key LED ON= the AGr key is set as "sticky".
5	Cursor / Num Lock LED	OFF = Num Lock is on (this is the default) and Cursor Navigation mode is off. The numeric keyboard performs the number functions. ON = Cursor Lock is set as "sticky"; the Cursor Navigation mode is on, and the Numeric function is off (the numeric keyboard performs the cursor navigation function). To turn off Cursor Navigation mode and turn on the Numeric function, press Fn + ".".

Using the Android operating system

This section introduces some basic information on using the Android operating system on the TSC710 controller. For additional information, go to the [Android website](#).

Press the **Power** key to turn on the TSC710 controller. The Android operating system will guide you through the setup process. The first time you use the TSC710 controller, you are prompted to set up a Wi-Fi network and a Google Account to use with your device.

Using Accounts

You can sign up for a Google Account or use one that you already have. You already have a Google Account if you use an email address to sign in to any Google product, for example: Gmail, YouTube, Google Play, Google Ads, Google Apps, or any other Google product.

When you sign in with your Google Account, you'll have access to everything associated with your Google Account, like Gmail, calendar, contacts, apps you've purchased on Google Play, and other data associated with that account. If you have multiple Google Accounts, you can add the others later.

WARNING – Make sure you remember the password you use to sign into your device or else you won't be able to access it. Even if you do a factory reset, you will be required to enter the password you used to sign into this device.

CAUTION – If you are using a company device, check with your company prior to adding personal accounts; your personal information may be accessible to others in your company if they use the same device.

Add a Google or other account

1. Open the **Settings** app.
2. Tap **Passwords & accounts**.
3. Tap **Add account**.
4. Tap the type of account you want to add.
 - To add your Google Account, tap **Google**. When you sign in with a Google Account, the email, contacts, calendar events, and other data associated with that account automatically

sync with your device.

- To add a different personal account, tap **Personal (IMAP)** or **Personal (POP3)**. You'd generally choose these if you use an email program like Microsoft Outlook or Apple Mail.

TIP – [Learn how to use IMAP or POP3 with Gmail.](#)

5. Follow the on-screen instructions.
6. If you're adding accounts, you may need to enter your device's pattern, PIN, or password for security.

You can add more accounts by repeating the steps above.

Remove a Google or other account

1. Open the **Settings** app.
2. Tap **Passwords & accounts**.
3. Tap the account you want to remove.
4. Tap **REMOVE ACCOUNT**.
5. If this is the only Google Account on the device, you'll need to enter your device's pattern, PIN, or password for security.

Remove a Google Work Profile

If you have added an Enterprise Google account, **Settings / Passwords & accounts** may show tabs for Personal and Work.

Trimble recommends that any Work profile is removed if you are going to factory-reset the device.

1. Open the **Settings** app.
2. Tap **Passwords & accounts**.
3. Select the **Work profile tab**.
4. Scroll down and tap **Remove work profile**. You may be asked to enter your device's pattern, PIN, or password for security.

The Android interface

When you turn on your device, the main **Home** screen appears. The **Home** screen is the primary screen for accessing all of the TSC710 controller features on the device. You can add and customize **Home** screen(s) by adding app shortcuts and widgets (an at-a-glance view of the app's most important information) and customizing access to frequently used settings (**Quick Settings**). The main parts of the screen are:



1	Status bar indicator icons are shown at the top of the display. The right side of the status bar shows the mobile signal strength, Wi-Fi signal strength, and how much battery charge is left. The left side shows the time and app notifications. To access Notifications and Quick Settings (frequently used settings): swipe down from the top of the screen. You can customize the Quick Settings tiles. See Customize the Quick Settings tiles, page 67 below. To quickly open all Settings, swipe down from the top of the screen a second time, then tap the Settings icon.
2	Home screen. To move between Home screens if you have more than one, swipe left or right. On the main Home screen, tap Google at the top of the screen or say OK Google (if Google Assistant voice activation is enabled) to search, send messages, ask for directions, or give other instructions. Otherwise, tap Search.
3	Android Back key. Returns to the previous screen you were working in, even if it was in a different app (not supported by all Apps). Once you back up to the Home screen, you can't go back any further.
4	Android Home key. Returns to the Home screen.
5	Android Overview key. Opens thumbnails of apps you've worked with recently. To open an app, tap it. To remove (shut down) an app, swipe it up.
6	App shortcuts to launch apps.
7	Widgets (e.g. the Google search bar). You can add other widgets to your Home screens as required. Touch-hold on the Home screen until a menu appears, then tap Widgets. Touch-hold a widget from the list to place in on your Home screen.

Android navigation keys

The TSC710 controller includes Android navigation keys (**3, 4, 5**) on the physical keyboard, so they do not appear on the screen.

Status bar

The Status bar (**1**) shows different status icons for various functions and apps on the device. Common icons show the battery charge status, Wi-Fi signal and connection status, mobile broadband signal and connection status, and Bluetooth connection status.

Customize the Quick Settings tiles

You can customize the **Quick Settings** tiles to suit your needs.

1. Swipe down from the top of the screen to open **Quick Settings** tiles — giving you quick access to items that you frequently use.
2. Swipe down again from the top of the screen to show all **Quick Settings** options.

You may have **Quick Settings** tiles on more than one **Home** screen; small dots below the tiles indicate this. Swipe left/right to switch between the screens.


3. To change the order and add or remove **Quick Settings**, tap the  icon.
 - To rearrange the order of any **Quick Settings** tiles that you already have showing, touch-hold then and drag and drop the required tile to where you want it.
 - To add new **Quick Settings** tiles, scroll down on the screen, then touch-hold and drag up and drop the required tile to where you want it in your **Quick Settings**.
4. Tap the Back arrow (top left of the screen) to exit Edit mode.

Apps screen

To see all apps that are pre-installed on the device and those that you downloaded from Google Play, swipe up on the **Home** screen to access the **Apps** screen.

On the **Apps** screen:

- To open an app, tap its icon.
- To search apps, enter the name of the app you are looking for in the **Search apps** bar.
- To place an app icon on a **Home** screen, see [Adding apps to a Home screen, page 68](#).

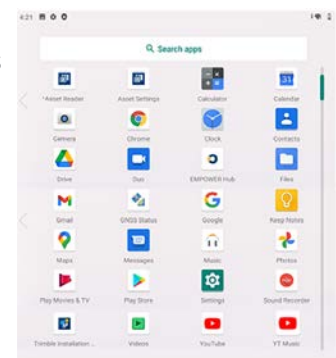

- To get more apps, tap Play Store .
- To explore apps, swipe up and down from the **Apps** screen to view the full list of apps installed on your device.

Adding apps to a Home screen

1. From the **Home** screen (or any **Home** screen if you have more than one) open the **Apps** screen.
2. Swipe up or down to find the app you want.
3. Touch-hold the app, then slide the app icon to any **Home** screen and place it where you want it, and then lift your finger off the screen.

Removing an app, shortcut, widget or group from the Home screen

1. Touch-hold the item on the **Home** screen, and drag upwards. A menu appears.
2. Continue to hold and drag the item up to **Remove** at the top of the screen, then lift your finger off the screen.
3. The **Remove** option removes the shortcut off your **Home** screen but does not uninstall the app from the device.

To move an app icon from the primary **Home** screen to another **Home** screen, touch-hold it, then slide the app icon to another **Home** screen.

Uninstalling apps

1. Touch-hold the item on the **Home** screen until a menu appears. Lift your finger off the screen.
2. Do one of the following:
 - Tap **Uninstall** to uninstall the app from the device.
 - Tap **App info**. On the App info screen, select **UNINSTALL** to uninstall the app.

Using the pre-installed Google apps and other apps

The TSC710 controller comes with a range of useful pre-installed software. The following describes some important bundled applications and summarizes what they can be used for.

Google bundled apps

	Google Play is a global online store to find, enjoy, and share your favorite apps, games, movies, music, and books on all your favorite devices.
	Google The Google app keeps you in the know about the things you care about. Find quick answers, explore your interests, and get personalized updates in your Google feed. The more you use the Google app, the better it gets.
	Google Chrome is a fast, easy to use, and secure web browser. Designed for Android, Chrome brings you personalized news articles, quick links to your favorite sites, downloads, and Google Search and Google Translate built-in. Enjoy the same Chrome web browser experience you love across all your devices.
	Gmail is an easy to use email app that saves you time and keeps your messages safe. Get your messages instantly via push notifications, read and respond online and offline, and find any message quickly.
	Google Maps allows you to navigate your world faster and easier with over 220 countries and territories mapped and hundreds of millions of businesses and places on the map. Get real-time GPS navigation, traffic, and transit info, and explore local neighborhoods by knowing where to eat, drink and go—no matter what part of the world you're in.
	YouTube is the official app for Android devices which allows you to see what the world is watching—from the hottest music videos to what's trending in gaming, entertainment, news, and more. Subscribe to channels you love, share with friends, and watch on any device.
	Google Drive is a cloud service safe place to back up and access all your files from any device. Easily invite others to view, edit, or leave comments on any of your files or folders. With Drive, you can safely store and access your files anywhere, quickly access recent and important files, search for files by name and content, share and set permissions for files and folders, view your content on the go while offline, receive notifications about important activity on your files, and use the device camera to scan paper documents.
	YT Music is a music app that allows you to easily find what you're looking for and discover new music. Get playlists and recommendations served to you based on your context, tastes, and what's trending around you.
	Google TV , previously Play Movies & TV, makes it easy to find and enjoy the entertainment you love in one place. With Google TV, you'll be able to browse movies and TV episodes across all of your streaming apps, see the latest releases, and create a watchlist shared across devices.
	Google Meet is a simple, high-quality video chat application for everyone. With its easy one-tap interface, Google Meet gives users simple, high quality video communication that just works on any device, so they never miss a moment with the people who matter most.

	Google Photos is the home for all your photos and videos, automatically organized and easy to find so you can share and save what matters.
	Calculator provides simple and advanced mathematical functions.
	Google Calendar is the official Google Calendar app to manage your schedule across multiple devices.
	Clock combines all of the functionality you need.
	Contacts is the official Google app that allows you to back up your contacts and sync them across all your devices. See each contact's email address, phone number, website, and other information at a glance.
	Google Keep Notes can be used to take notes, including text, lists, images, and audio.
	Messages is Google's official app for texting and can be used to send SMS text messages to your contacts.
	Recorder brings the power of search to audio recording. Meetings, lectures, band practices, family memories—anything you want to save and listen to later. Recorder automatically transcribes and labels what you record so you can easily find the parts that matter to you.

Other bundled apps

	Settings. Under Settings, you will find configuration settings for Wi-Fi, Bluetooth, VPN, cellular, sounds, notifications, display, security & privacy, language& keyboard settings, passwords & accounts, etc.
	Files is a file manager that you can use to view and open recent files, including images, videos, audio and downloads stored on the device or in Google Drive.
	Camera. The Camera app lets you take regular photos or video using the rear facing camera on the device.
	Trimble Empower Hub is a utility for management of Empower modules on the Trimble Empower enabled devices.
	Trimble Installation Manager for Android enables you to easily install and update supported Trimble software to supported devices running the Android platform.
	Music is a utility for managing songs, albums, artists and playlists stored on the device.
	Videos is a utility for videos stored on the device.

Getting more apps

You can get apps, games, digital content and popular office apps such as Google Docs, Sheets, and Slides for your device using Play Store. Play Store is pre-installed on your TSC710 controller.

1. Open **Apps** and tap Play Store .
2. Use Play Store to search and browse for content to download.

For specific Trimble apps, use Trimble Installation Manager .

Using wireless networks

The TSC710 controller supports wireless connectivity; connect to wireless networks using the built-in Wi-Fi radio (also sometimes called Wireless LAN, WLAN, or 802.11), or the built-in mobile broadband data (also called Wireless WAN, WWAN, mobile data or cellular data) capability.

This section describes how to get online with the TSC710 controller using these wireless networking capabilities.

The TSC710 controller also has an NFC (Near Field Communications) antenna and module, designed for very short range radio communications with other NFC devices.

Working with Wi-Fi networks

Using Wi-Fi you can connect to a wireless network and browse the internet, download apps, send email messages, access online services, or access other computers and devices on your network.

Before you can send and receive data over Wi-Fi, you need to turn on Wi-Fi on the TSC710 controller and connect to a wireless network.

Accessing Wi-Fi settings and connecting to a network

You can access Wi-Fi settings and connect to a network from the following:

- From the **Apps** screen, open the **Settings**  app. Tap **Network & internet**, then tap **Internet** to open the **Internet** settings screen.
- From **Quick Settings** on a **Home** screen. Swipe down from the top of the screen to open **Quick Settings**. If the device is connected to Wi-Fi, the **Internet** Quick Settings tile shows a Wi-Fi icon with signal strength; if not connected, a globe icon with a question mark is shown. Tap the **Internet** Quick Settings tile to open the Internet pop-up dialog.
Tap **See All** at the bottom of the pop-up dialog to access the full list of available Wi-Fi networks.
- From **Quick Settings**, tap-hold the **Internet** Quick Settings tile to open the **Internet** setting screen.

From **Quick Settings** or the **Internet** settings screen:

- To turn Wi-Fi on if it is off, tap the slider to turn Wi-Fi on. A list of available networks displays.
If the network is secured and you need a password, a padlock icon displays next to the network.

- To connect to a network when Wi-Fi is on, tap the required network to connect to it. Follow the instructions on-screen to enter the password if one is required.
- To turn Wi-Fi off if it is on, tap the slider to turn Wi-Fi off.
- If Wi-Fi is on and you are connected to a network and want to connect to a different network, tap the network you want to connect to. Follow the instructions on-screen to enter the password if one is required.

See [The Android interface, page 65](#) for more information on the **Apps** and **Home** screens, and **Quick Settings**.

Once you are connected:

- **Connected** shows under the network name.
- The Wi-Fi network is a **Saved network**. When in range, your device automatically connects to it.

Disconnecting from a Wi-Fi network

At the top of the **Internet** screen, tap the **On/Off** switch to turn off Wi-Fi. Or, tap the network and tap **Disconnect**.

Forgetting a Wi-Fi network

If you do not want your device to automatically connect to a saved Wi-Fi network, you can forget that network.

To forget a wireless network so it no longer appears in your list of networks:

1. From the **Apps** screen, open the **Settings**  app.
2. Tap **Network & internet**.
3. Tap **Internet**.
4. At the top of the **Internet** screen, make sure the **On/Off** switch is On.
5. Tap the saved network you want to forget, then tap **Forget**.

Advanced Wi-Fi settings

To change the advanced Wi-Fi settings on your device:

1. On the **Internet** screen, scroll down past the available networks and tap **Network preferences**.
2. Tap an available setting option:
 - **Turn on Wi-Fi automatically.** Wi-Fi will turn on near high-quality saved networks, e.g. your home network.

- **Notify for public networks.** Get a notification when your device finds a Wi-Fi network to which it can connect.
- **Install certificates.** Digital certificates can identify your device for many purposes, including VPN or Wi-Fi network access.
- **Wi-Fi Direct.** Let your device connect with other Wi-Fi Direct-capable devices without a network.

NOTE – For IMEI, IP Address, and MAC address, tap **About Device** in **Settings**.

Working with mobile broadband

The TSC710 controller has an integrated cellular modem enabling you to connect to a mobile broadband network. The TSC710 controller supports Worldwide 5G and LTE (where available), and is compatible with AT&T- and Verizon-certified 4G and 5G networks, PTCRB certified carriers, and other networks that support these certifications.

Before you can send and receive data over mobile broadband, you must have a SIM card in the device (see [Inserting a SIM card \(optional\)](#), page 28). You must then turn on Cellular data on the TSC710 controller and configure the connection.

Using mobile data

You can adjust how your device uses mobile data by changing your cellular network settings.

Depending on your carrier and service plan, your device may connect automatically to your carrier's fastest available data network. Or you may need to choose settings and use a SIM card for a specific carrier.

To adjust cellular network settings:

1. From the **Apps** screen, open the **Settings**  app.
2. Tap **Network & internet**, then tap **Mobile plan**.
3. If there is no SIM card in the device, you are prompted to insert one and restart the device.
4. Adjust the settings as required:
 - **Mobile data.** Access data using mobile network.
 - **Roaming.** Let your device transmit data over other carriers' networks when you leave an area covered by your own carrier's networks.
 - **App Data** usage.

Locating the device's IMEI number

The IMEI number is a unique 15-digit number that identifies the cellular module installed on your device. Your mobile broadband operator may need to know the IMEI number of your device to register the device.

with the network and activate your mobile broadband data plan.

The IMEI number is printed on the serial number label located in the removable battery / SIM card compartment on the back of the device; see [Installing and removing the optional accessory battery pack, page 30](#) or [Inserting a SIM card \(optional\), page 28](#) for instructions on removing the compartment cover.

Alternatively, to check the IMEI number in the operating system:

1. From the **Apps** screen, open the **Settings**  app.
2. Tap **About device**.
3. Tap **IMEI**.

If you cannot find the IMEI number for your device, or you do not have the device with you, contact your reseller.

Using NFC (Near Field Communications)

The TSC710 controller has an NFC (Near Field Communications) antenna and module placed underneath the neck footpad on the back of the device.

The NFC antenna is meant for very short range radio communications with other NFC devices. The range is up to 4 cm (1.6 inches).

NFC in the TSC710 controller is used for automatically pairing to a Bluetooth device, accessing technical information like radio channels, and other tasks.

Trimble NFC systems do not support point of sale protocols.

To use NFC:

1. Access the section of the application software that supports NFC.
2. Align the TSC710 controller NFC antenna indicated by this icon  on the neck footpad with the NFC antenna in the other device. Make sure the antennas are less than 4 cm apart and are approximately parallel to each other. If a connection does not occur, try holding the devices closer together.
3. Follow the instructions in the application software.



Trimble NFC systems conform with international standards and should work with non-Trimble devices. However, it is the application software that dictates the interactions. The application decides what to do with the transmitted data.

Airplane mode

If you are traveling on an airplane, or don't need to use wireless functions on the TSC710 controller for a while, use Airplane mode to turn on or off wireless radios with transmitting features built into the TSC710 controller, including Wi-Fi, Cellular, Bluetooth, or GNSS, as well as any wireless radios connected to the TSC710 controller such as Empower modules.

To turn Airplane mode on or off:

1. Swipe down from the top edge of the screen twice to open **Quick Settings** (see [The Android interface, page 65](#) for more information about Quick Settings).
2. Tap the Airplane mode icon to turn it on or off.

Working with GNSS

The TSC710 controller has a built-in 4 meter accuracy GNSS (Global Navigation Satellite System) receiver module, and an integrated antenna.

The TSC710 controller, via Trimble application software, supports most of the external Trimble GNSS receivers. Refer to the documentation for the Trimble receiver you want to use with the application software, and check the specifications and connection options. If you want to connect via Bluetooth make sure your receiver is capable of using current Bluetooth security; older receivers may not connect due to the security expectations of the Android operating system.

You cannot use an external antenna with the TSC710 controller's integrated GNSS receiver. For advanced GNSS setups, use a survey-grade receiver.

Using the compass

The compass can be accessed and used by any app that requests access to the compass. The compass is not designed for precise work, but can provide a general heading. Most apps allow for calibration using the method below, but not all will provide an accuracy indication like Google Maps does.

Some applications display Magnetic North and others will correct for declination to display True North. Some are automatic, some are set in settings. Depending on your location in the world, the declination can be 20° or more. Be aware of what settings your app is using to get accurate results.

Calibrating the compass

CAUTION – If an Empower module is installed or removed from the device, the compass must be re-calibrated, or you may experience poor accuracy.

A device that is exhibiting poor accuracy may have bad calibration data on the device. In most cases, this will be resolved after performing one to four calibrations (figure 8 motions) to clear out bad data and correctly calibrate the device. If the compass still appears inaccurate, more calibrations may improve this.

1. On the device, open the Google Maps app.

NOTE – Calibration is an operating system function, it is not done by the app you are using. Any time that the compass is being used by an app, moving the device in the figure-of-eight pattern will calibrate it; however using the Google Maps app is useful because you can see the effect of performing the calibration.

2. If the blue dot's beam is wide or pointing in the wrong direction, calibrate the compass.
3. Make a figure 8 until your compass is calibrated. You should only have to do this a few times.

The beam should become narrow and point in the right direction.

Be aware that local conditions, the presence of power lines and other electrical sources, or the proximity of large ferrous metal objects like vehicles can affect the output of the compass.

Using accessories and connecting to other devices

You can connect monitors, accessories, and other devices directly to your TSC710 controller using USB or Bluetooth.

Connecting to USB accessories

CAUTION - Cellular, Bluetooth, Wi-Fi, and GNSS performance may be degraded while a USB 3 device is connected to the USB port.

The high data rates of USB 3 devices can produce radio-frequency / electronic noise that can possibly interfere with these other devices. This would typically be when copying data from the device to a USB 3 memory stick or via a USB 3 cable to a computer. To prevent this degradation, avoid connecting USB 3 peripherals while you want to use those systems.

The TSC710 controller has a USB type C port for connecting USB devices, such as a flash drive, scanner, printer, keyboard, or mouse, or for connecting to a computer for data transfer. The TSC710 controller has built-in support for mass storage devices and human interface devices.


Other types of USB devices may require specific applications to work.

To connect a USB device, plug the device cable into the USB (type C) port on the bottom of the TSC710 controller .


Using USB Type-C locking cables


If a locking USB Type-C cable is required, there are many 3rd party options available. Below are the required specifications for compatible cables with the TSC710 controller.

The Type-C connector should be the dual screw USB Type-C locking plug type, as specified by the [Universal Serial Bus Type-C Locking Connector Specification Revision 1.0 March 9, 2016](#). The below figures are extracted from the above specification, highlighting the required critical dimensions for the locking plug:

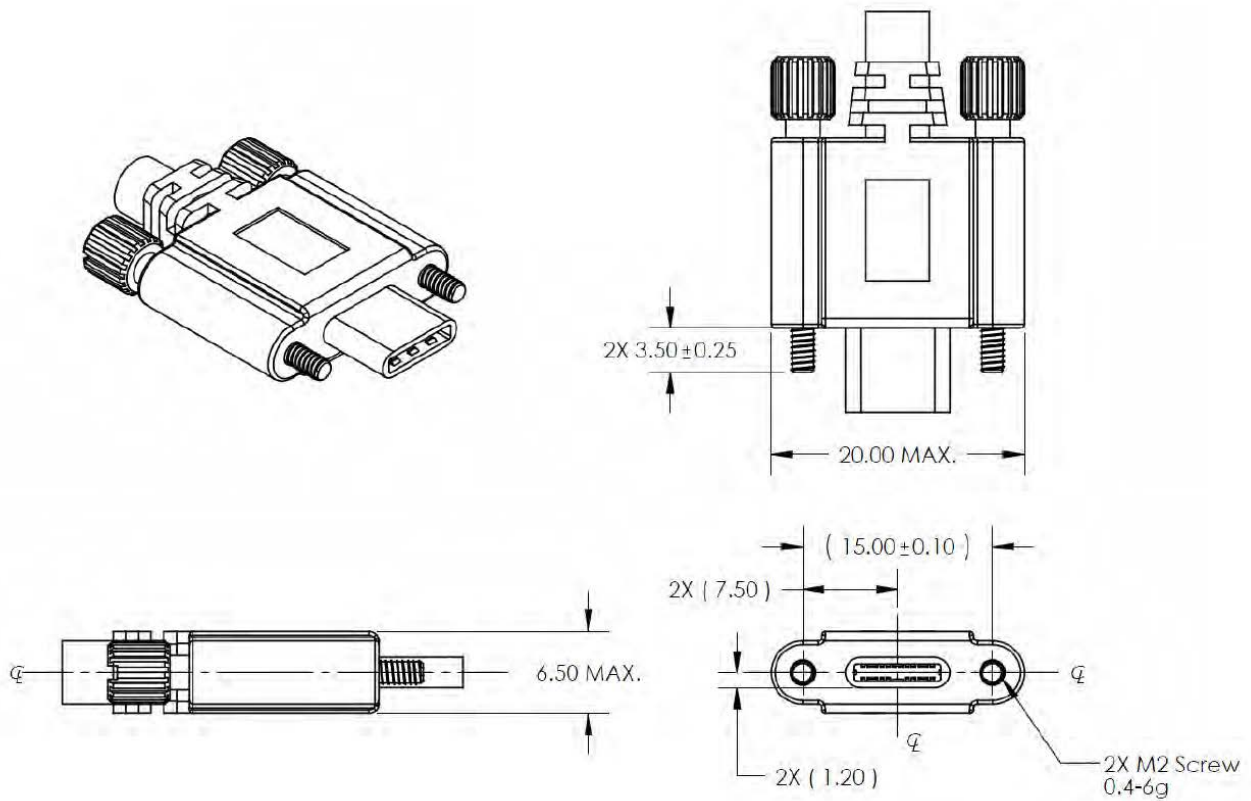

Threaded hole location relative to receptacle for the dual screw version:

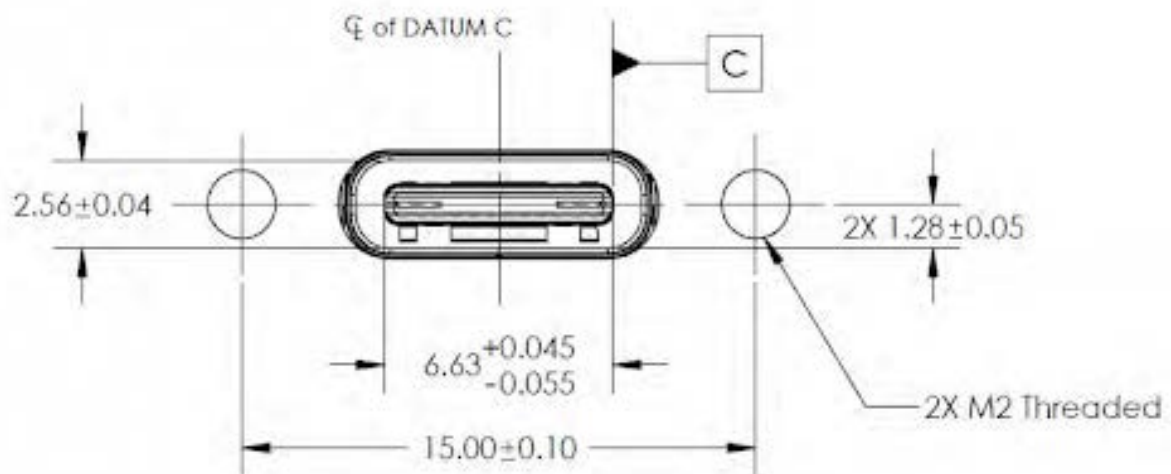

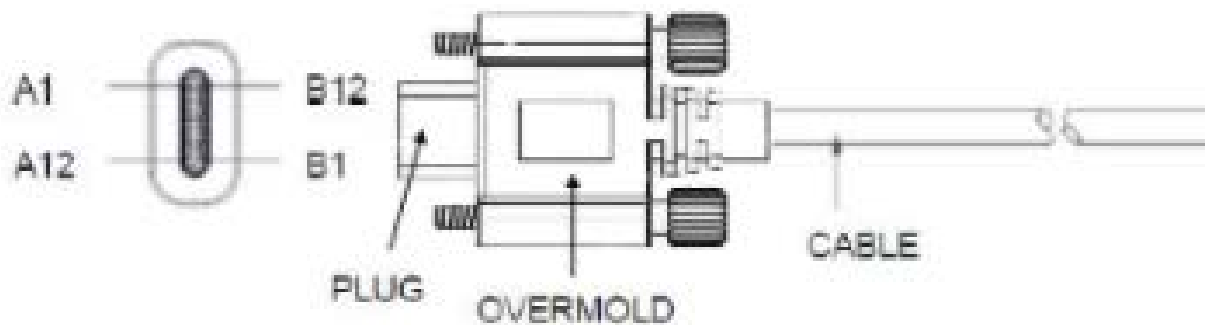

Connecting to Bluetooth accessories

The TSC710 controller has embedded Bluetooth wireless technology—a short-range wireless communication technology that allows wireless data transfer and communication between devices over a distance of up to 100 meters (328 feet).

You can use Bluetooth wireless technology to connect the TSC710 controller to a Bluetooth headset.

Turning Bluetooth on or off

1. Swipe down from the top of the screen.
2. Tap **Bluetooth** to switch Bluetooth **On** or **Off**.

When Bluetooth is on, the Bluetooth button at the top of the screen is illuminated.

TIP – To save battery, turn off Bluetooth when you are not using it.

Pairing and connecting a Bluetooth device with the TSC710 controller

Before you can transfer data or communicate between your TSC710 controller and another Bluetooth enabled device, you must pair the TSC710 controller and the device.

Step 1: Pair a Bluetooth accessory

1. Swipe down from the top of the screen and tap-hold **Bluetooth**, or go to **Settings/ Connected devices**.
2. Tap **+ Pair new device**. A list of available Bluetooth devices that are within range is displayed.
3. Tap the name of the Bluetooth device you want to pair with your device.

4. Follow any on-screen instructions. If the pairing is successful, the TSC710 controller connects to the device.

TIP – If you are asked to enter a passcode or Bluetooth PIN, try entering 0000 or 1234 (the most common passcodes), or see the documentation that came with your Bluetooth device. Some old Bluetooth devices do not require a PIN.

NOTE – To connect to a Bluetooth-enabled receiver with a PIN, if for any reason you cannot connect via Bluetooth, connect over Wi-Fi to configure the receiver. The IP address is in most cases 192.168.142.1. Refer to the documentation for the receiver for details and receiver specific settings.

Step 2: Connect to a Bluetooth device

After pairing with a Bluetooth device, you can connect to it manually— for example, to switch devices or to reconnect after a device comes back in range.

1. Swipe down from the top of the screen.
2. If Bluetooth is turned off, tap **Bluetooth** to turn it on.
3. Tap-hold **Bluetooth**.
4. In the list of paired devices, tap a paired but unconnected device.

When your phone and the Bluetooth device are connected, the device shows as **Connected**.

Transferring files via Bluetooth to a Windows PC

1. On the PC, click the Bluetooth icon in the tool tray and select **Receive a File**.
2. On the TSC710 controller, open the **Files** app, select the file you want to transfer, and tap , which gives options for sharing. Tap **Bluetooth**.
3. Select your PC in the list of Bluetooth devices, and the file will start to transfer.
4. On the PC, once file transfer has finished, navigate to a location where you want the file saved.

Connecting to RS-232 peripherals

If you require an RS-232 port, you can connect a 3rd party USB-C to RS-232 adapter.

To connect an RS-232 device, plug the device cable into the RS-232 adapter port and plug the USB-C plug on the adapter into the USB-C port on the TSC710 controller.

The adapter may require drivers or software to be installed on the TSC710 controller.

Refer to the documentation for the RS-232 device for instructions on setting up and using the device.

Transferring data between your TSC710 controller and another computer

You can transfer data or files between your TSC710 controller and another device. There are a number of ways you can do this, including:

- using a USB (type C) data transfer cable. See [Transferring data using a USB-C cable, page 83](#).
- using a USB (type C) memory stick; see [Connecting to USB accessories, page 79](#).
- via Wireless LAN; see [Working with Wi-Fi networks, page 72](#).
- via Bluetooth; see [Connecting to Bluetooth accessories, page 81](#).
- using cloud-based file sync services, such as [Dropbox](#), [Microsoft OneDrive](#), [Google Drive](#) over Wi-Fi or WWAN.
- using Quick Share; search for help on the Android Help site <https://support.google.com/android>

Transferring data using a USB-C cable

You can transfer data to a device powered by a Windows® operating system or to a MacOS device using a USB (type C) data cable.

Transfer with the Windows operating system

This method doesn't require any drivers or anything else to be installed on the Windows 10 / Windows 11 device.

1. Unlock the screen on the TSC710 controller.
2. Use a USB type C data transfer cable to connect the TSC710 controller to the Windows device.
3. On the TSC710 controller, the **USB Preferences** screen opens.
4. Under **Use USB for**, tap **File Transfer**.
5. On the Windows device, open **File Explorer**. Under **This PC**, you should see **TSC710**; click to expand it to view the folders on the TSC710 controller .
6. You can now view and transfer the files on the TSC710 controller from the Windows file browser. Use it to drag and drop files, just like other external storage devices.
7. When you are done, eject the TSC710 controller from the Windows device and unplug the USB cable.

Transfer with a MacOS device

To transfer files, you must use third party software designed for the purpose. There are applications for both the device and for the MacOS device. The best method of transfer to a Mac is to use a cloud service or a USB memory stick.

Using Trimble Empower modules

The TSC710 controller has two Trimble Empower bays. Empower bays can be used to extend or expand the basic capabilities of your device. Empower modules can be installed, removed, or moved from one Empower-enabled device to another. The Empower modules make it easy for you to manage a fleet of devices across multiple users, field roles, and job requirements.

The functionality of Empower modules is unlocked through applications and utilities developed specifically for each module. For more information about using Trimble Empower modules, refer to the module documentation.

Module functionality can also be directly integrated into field software by developers.

The TSC710 controller allows two Empower modules to be installed at a time.

Attaching and removing Empower modules

To attach a module, see [Attaching an Empower module \(optional\), page 39](#).

When you attach a module, make sure that the Empower Hub and other supporting software is updated. See [Installing Empower module drivers and software apps, page 84](#).

You do not need to remove a module from the device unless you need to swap it between devices, or for troubleshooting purposes (e.g., if the device does not recognize the module is attached).

To remove the module:

1. Make sure the [device is turned off](#).
2. Using a Phillips #1 screwdriver or the screwdriver incorporated in the stylus, loosen the 2 captive screws at the bottom of the Empower module. Slide the module up and off. Store the module in a safe, dry location to prevent damage to the module interface pogo-pins.

Installing Empower module drivers and software apps

The Empower software and drivers come installed in the operating system.

If you need to check for updated drivers and software apps on the TSC710 controller for the device to recognize and operate the module:

- Go to the TSC710 controller Help on <https://help.fieldsystems.trimble.com/portal/home.htm>, or directly to <https://mcs.trimble.com/> and check for any updates that may be needed.
- Check the Trimble Installation Manager software, which is installed on the TSC710 controller, for any Trimble application software updates.
- Refer to the documentation supplied with your module for instructions on which components to update and how to use the module and software utilities.

Configuring and controlling a module with the Trimble Empower Hub application

The Empower Hub is a centralized location to control and manage Trimble Empower modules from one convenient, easy-to-use application. The Empower Hub comes installed on the TSC710 controller and can be used to monitor module status and manage modules attached to your device, including:

- View module status information
- Enable and Disable connected modules
- Launch utilities to configure your module(s)
- Configure and launch applications associated with your modules
- Check for and install module firmware updates

Turn on the device and from the **Home** screen, swipe up to open the **Apps** screen. Tap on the Empower Hub icon to start the Empower Hub app.

For more information, refer to the module documentation.

TIP – To save battery power, turn off the Empower module if you will not be using it for a prolonged period.

Powering modules in the Empower Hub

Most Empower modules can be powered off. This can be useful if you are still using the device, but are not using the Empower module. All Empower modules draw some power, even when they are not being used. Power off the Empower module to help maximize battery life.

Application software can also power modules on and off. They will often power off a module if you stop using it in the current software configuration.

To power off the module in Empower Hub, tap the toggle switch at the top of the information screen.

Using the camera

The TSC710 controller is fitted with one rear facing 13MP autofocus camera with LED flash. The camera is accessible from the Camera app.

NOTE – The device may be shipped with a protective film covering the camera and flash windows. Remove the film with a fingernail or the plastic stylus tip before first use to ensure proper focus and exposure of your photos and videos.

By default, the built-in Camera app is ready to take photos, but you can switch easily between photo and video mode.

Before you use the camera, make sure you have removed the protective film on the camera and flash window.

To take a photo or record a video:

1. Swipe up on the **Home** screen to access the Apps screen.
2. Tap the **Camera** app to start the camera.
 - By default, the app opens in Camera mode. Tap the Camera icon to take a photo.
 - To switch to Video mode, tap **Video**. Tap again to start recording.
 - Tap the Pause icon to pause / restart the video.
 - Tap the microphone icon on the left side of the screen to turn sound on or off.
 - Tap the Camera icon while in Video mode to take a photo.
 - Tap the Stop icon to end the recording. To return to Camera mode, tap the Camera icon.

To zoom in, move your thumb and forefinger apart on your screen. To zoom out, pinch your thumb and forefinger on your screen. You can also use the on-screen slider to zoom in / out.

To focus on and expose the subject of the photo, tap it on your screen.

To see the photos you've saved, tap the thumbnail image in the corner of the screen.

By default, your photos and videos are saved to the Photos app on the TSC710 controller; open this app from the Apps screen.

You can also look through your photos and videos from:

- the **Camera app**: tap an image thumbnail to open the photo. Swipe right or left to scroll through other photos / videos in your collection.

- the **Files app**: Images captured with the Camera app are automatically accessible in the Files app. Open the Files app from the Apps screen.

Enable the Camera app to access your location to geo-tag photos

1. In the Camera app, tap .
2. In the **Settings** list, tap **GPS location** to toggle on/off as required.
3. To close the **Settings** screen and return to the Camera app, tap the back arrow (top left of the screen).

Changing camera settings

- Tap the camera **Flash** icon to toggle through Flash On, Flash Off, or Flash Auto.
- Pro Mode can be selected at the bottom of the screen to provide more control over picture parameters such as f-stop, ISO, and White Balance directly from screen sliders.
- Tap the **Filter** icon on the left of the screen to select a filter for your photo.
- If no Filter is selected, tap the tap the ... menu to access settings for:
 - Automatic
 - HDR
 - More setting options — tap . From here you can set picture size, picture quality / resolution, storage location, a countdown timer, face detection, exposure, white balance, shutter sound, along with Video camera settings.

Troubleshooting

This section contains answers to some common troubleshooting questions. If you encounter problems when using the TSC710 controller, try the following troubleshooting tips to detect and solve the problem. If problems persist, contact your local distributor for support.

Further assistance and support with the Android operating system

For comprehensive online support, how-to guides, troubleshooting articles and related downloads for the Android operating system, go to the online [Android support pages](#).

- [Performance issues, page 88](#)
- [Empower module issues, page 90](#)
- [Wireless connectivity issues, page 91](#)
- [Compass accuracy issues, page 91](#)
- [Power and battery issues, page 92](#)
- [Restarting or resetting the operating system, page 95](#)
- [Operating system and software updates, page 96](#)
- [Repairing your device, page 97](#)

Performance issues

Device is running slowly, restarts or crashes frequently

If your device is running slowly, keeps rebooting itself, or crashing without restarting, one of the steps below may fix the issue. After following the steps for each recommended solution, check whether it fixed your issue.

Check for Android updates

System updates can bring improvements that may fix your issue. To check for and install system updates:

1. Tap  to open the **Settings** app.
2. Scroll to the bottom and tap **System update**. The update status displays.
3. Follow any on-screen instructions.

Check storage and free up space

You may experience issues if the device's internal storage is full or almost full. The device can start having issues when less than 10% of storage is free.

To check how much storage the device has:

1. Tap  to open the **Settings** app.
2. Tap **Storage** to see how much storage is available.

To free up space that the device needs to work properly, remove unnecessary files and clear cached data.

Check for app updates

App updates can bring improvements that may fix your issue.

To get updates for your Trimble apps through **Trimble Installation Manager**, tap . Refer to the Trimble Installation Manager help at <https://help.fieldsystems.trimble.com/installation-manager-android/home.htm> for more information.

To see and get updates for your apps on Google Play Store:

1. Open **Play Store**.
2. If you are not logged in to your Google account, you must log in.
3. At the top left, tap .
4. Tap **Updates**.
5. Apps with available updates are labeled **Update**. If an update is available, tap the app **Update**. If multiple updates are available, tap **Update all**.

Close apps that you are not using

Normally, you don't need to close apps; Android automatically manages the memory that apps use. But to completely shut down an app, including any background services that it may be using:

1. Tap  to open the **Settings** app.
2. Tap **Apps** then if required tap to expand the list of **All apps**.
3. Tap the app that you want to close.
4. Tap **Force stop**, then tap **OK**.

TIP – To help identify apps that cause problems, make a list of which apps you have manually force-stopped.

Check if an app is causing the issue

The issue may be caused by an app that you downloaded. To see whether a downloaded app is causing the issue, you can reboot your device in safe mode. Safe mode temporarily disables all downloaded apps.

1. To reboot the device in safe mode and temporarily disable all downloaded apps:
 - a. Press the **Power** key on the keyboard until the **Power** menu appears, or swipe down from the top of the screen to open **Quick Settings** then tap the **Power** icon (bottom right of the screen).
 - b. On the **Power** menu, tap-hold **Power Off**.
 - c. You will be prompted to Reboot to safe mode. Tap **OK**.
2. Once in safe mode, wait to see if the problem goes away.
 - **If the issue isn't resolved in safe mode**, a downloaded app is most likely not causing the issue. Restart the device and try other troubleshooting solutions.
 - **If the issue is resolved in safe mode**, a downloaded app is most likely causing the issue. To find out which app it is:
 - a. Restart the device to exit safe mode.
 - b. One by one, uninstall recently downloaded apps. After each removal, restart the device and check if the issue is resolved.
 - c. When you have identified and removed the app that was causing the problem, you can reinstall the other apps that you removed.

Empower module issues

My field software doesn't recognize my Empower module

- Check module contacts and attachment

It is possible the contacts between the module and the device are dirty, or that the module is not attached correctly. Ensure that the module contacts are clean and that the screws are tightened correctly.
- Your field software is not configured to communicate with the Empower module

Run the Empower Hub app and check if it "sees" the module. If it does not, make sure the module is powered on using the toggle switch in Empower Hub and/or check the mounting and contacts again.

Try rebooting the device and check in the Empower Hub app again.

The Empower Hub doesn't show my module

- Check module contacts and attachment.

It is possible the contacts between the module and the device are dirty, or that the module is not attached correctly. Ensure that the module contacts are clean and that the screws are tightened correctly.

- Make sure the module is powered on using the toggle switch in the Empower Hub app.

Refer to the Trimble Empower modules documentation for more information.

Wireless connectivity issues

Wi-Fi speed is slow

- Your network is running slow for all devices.

You should first check to see whether your network is slow on another device. Can you connect to your wireless network and browse the web at normal speeds from another device? Try running a Network Speed Test to ensure your internet connection is functioning normally.

- Your Wi-Fi signal is weak.

Look at the Wireless network icon in the taskbar.

This icon  shows your current signal strength. If the icon is partially dimmed, move your device closer to your wireless router to see if the signal improves. If your router is broadcasting on both a 2.4 GHz and 5 GHz frequency, try connecting to a different frequency. In general, a network operating on the 5 GHz frequency will be faster and less susceptible to interference, but will have a shorter range than a 2.4 GHz network.

Compass accuracy issues

You may need to re-calibrate the compass, especially if you have removed or [installed an Empower module](#) or [optional accessory battery pack](#).

See [Using the compass, page 78](#) for more information.

Power and battery issues

NOTE – The accessory Li-35 battery **part number 220200 is compatible** with the TSC710 controller.

The older Li-35 battery **part number 120200 is not compatible** with the TSC710 controller. The ridge/grip design on the sides of the battery will not allow an older battery part number 120200 to be installed in the TSC710 controller.

Check the label on the battery for the part number.

Battery (internal or user-removable) will not charge

- The battery is overheated, or too cold.

The battery will charge between 0 °C and +40 °C (+32 °F and +104 °F). If you have been using or storing the battery and/or device in a particularly hot or cold environment, the battery may be outside the safe charging temperature range. Sensors in the battery will prevent the battery from charging until its temperature returns to a normal level.

- The optional removable battery is not installed correctly.

If the optional removable battery is not installed correctly in the device or the battery charger, it may not have a proper connection and will not charge.

- The optional removable battery terminals are dirty or corroded.

If the terminals of the battery are dirty or corroded, it may not have a proper connection and will not charge.

Device will not start up

- Device doesn't turn on but the charge LED turns on.

If the charge LED turns on when you press-hold the Power key for four seconds but the display doesn't show anything, press-hold the Power key until the charge LED blinks off then comes on again (typically after you have pressed-held the Power key for 15 to 20 seconds), then release the Power key. This forcibly turns off the device, and you should then be able to power it on again. Note that if you don't release the Power key within a few seconds of the LED flashing off / on, the device may turn off but the operating system starts.

If the charge LED doesn't turn on when you press the Power key, you may have an undervoltage battery or failed battery (see below, [Low charge, very low charge, or failed battery, page 93](#)).

- The batteries do not have enough charge to power the device.

The internal battery must be partially charged to boot the device, and the device must be between –20 °C and +60 °C (–4 °F and +140 °F) to boot up. Plug the charger into the device and leave on charge for 30 minutes then try to boot the device. If after you press the Power button you see a battery

indicator on the screen with a red charge level and charger icon, the battery needs to continue charging before the device can turn on.

- Check the optional user-removable battery charge level.

If the device will not power on with the internal battery, check the optional user-removable battery charge level, if available. Remove from the device, and press-hold the charge indicator button on the battery. At least one charge LED must be lit up to indicate that a battery has enough power for the device to start on battery power. If no LEDs light up on a battery, swap the battery for a charged battery, or charge the battery using the battery charger accessory before reinserting it.

- The optional removable battery is not installed correctly.

The device may not be receiving power from the battery if it is not installed properly. Remove the battery, then [replace it correctly](#). Replace the battery bay door and tighten the 4 screws.

Device suddenly turns off during use

- Make sure you are not accidentally pressing the Power key.

The Power key is located on the left side of the keyboard. Make sure that while gripping the device you are not accidentally pressing the Power key, which places the device into suspend mode.

- The device may have run out of power.

If your device's battery charge level gets too low, the device will automatically power down. You must charge the internal battery before it will turn on, or insert an optional user-removable battery. See [Checking the battery charge levels and LED status, page 44](#) for more information on batteries.

If you regularly run out of battery power while in the field, consider carrying a spare accessory battery pack with you.

If you already have a removable battery installed in the device, shut down the device then remove the battery from the device, and check the battery level by pressing-holding the battery level button on the battery. If the battery charge is too low, reinsert the battery into the device and attach the device to an external power source, swap the battery for a charged battery, or charge the battery using other means if available, before reinserting it.

Low charge, very low charge, or failed battery

The device and batteries have a number of "low battery" states which have different charging behaviors.

- **Normal low battery state.** If you leave the device running and the operating system triggers a shutdown because the battery charge level is low (about 3% on the removable battery, if fitted, and 0% or 1% on the internal battery), the device will be in a normal low battery state.

In this state, when you press the Power key for four 4 seconds — which would normally start the device — you will see an "insert charger" image. If you connect a charger, the device will go to a charge-only state. Initially, this may not allow booting; pressing the Power key (a short press or a four second press) will give a "low battery charging" indication. After a short period (usually less than 10

minutes) the battery should have high enough level for the operating system to run . At this stage, a short Power key press will display a charging animation with the battery level, and a four second press will start the operating system.

- **Battery undervoltage state.** If the battery voltage drops below a certain level, the battery output is disabled to prevent further drain. This can be caused by leaving the device shut down for an extended period (months), or if the operating system fails to shut down correctly and the device is left in a hung or unresponsive state. In the case of the operating system being left in a hung state, the undervoltage state can be reached in days or weeks. A device with a battery in undervoltage state will not give any indication when you press the Power key (the Power LED does not turn on). When you connect a charger, the "low battery charging" indication is given (as described above), and after a period of charging (usually less than 30 minutes) the device should start with a four second Power key press.
- **Battery safety undervoltage state or other failed battery condition.** If the battery voltage drops below a safety-critical level, the battery output is permanently disabled because charging may be a safety hazard. This is only likely to occur after the device has reached a Battery undervoltage state and then been left for an extended period. A similar permanently failed battery state can be caused by extremely high temperatures (over about 80° C).

When you connect a charger to a device with an internal battery in safety undervoltage, a failure indication (exclamation mark) displays. This is a permanent failure - the battery is damaged and should be replaced.

If the internal battery has failed, you can start the device using a charged removable battery; a device with the internal battery in a permanently failed state will not boot when a charger is attached, unless you install a removable battery. With a charged removable battery installed, the device will boot and operate normally (with an indication of failed internal battery), enabling you to recover data from the device.

The indications for the different scenarios are:

- **failed internal battery, no removable battery**
 - if the device is off and no charger is attached, there is no indication
 - if the device is off and a charger is attached, the charge LED is red, and the device will repeatedly attempt to boot but will fail
- **failed internal battery and working removable battery**
 - if the device is off and no charger is attached, there is no indication
 - if the device is off and a charger is attached, the charge LED is red, and the operating system will start
 - if the operating system is running and no charger is attached, the charge LED is red, and the internal battery on the status bar and the internal battery under Status / Battery will show an exclamation mark
 - if the operating system is running and a charger is attached, the charge LED is red, and the removable battery on the status bar and the removable battery under Status / Battery will show a charging symbol
- **failed removable battery and working internal battery**

- if the device is off and no charger is attached, there is no indication
- if the device is off and a charger is attached, the device goes into charge-only mode. The charge LED is red but the charging is normal
- if the operating system is running and no charger is attached, the charge LED is red, and the removable battery on the status bar and the removable battery under Status / Battery will show an exclamation mark
- if the operating system is running and a charger is attached, the internal battery on the status bar and the internal battery under Status / Battery will show a charging symbol

Restarting or resetting the operating system

If your device becomes unresponsive, and the troubleshooting guide does not resolve the problem, you need to restart or reset your device.

Restarting your (unresponsive) device

If your device is no longer responding to touchscreen or keypad input, you may need to force it to restart by removing power from the system.

CAUTION – Restarting the system by holding down the Power key removes power to the CPU. Any unsaved files and settings will be lost.

To force your device to restart:

1. Press-hold the Power key.
2. The charge LED will initially be green, wait for 15 to 25 seconds until the LED turns off briefly then on again, then release the Power key.

The device will either shut down or restart, depending on how long after the LED off-blink you release the Power key. If the device shuts down, [restart it as normal](#).

Resetting your device to factory default settings

If restarting your device does not resolve the issue that you are seeing, resetting it might help.

You can remove all data from your device by resetting it to factory settings.

WARNING – A factory reset wipes all data from the device. While any data stored in your Google Account in the cloud will be restored, all apps and their associated data will be uninstalled.

WARNING – Your device is protected to prevent other people from using it if it's been reset to factory settings. After a factory reset, you'll need to enter your Google username and password associated with the device . If you don't have this information, you won't be able to finish the setup process and use the device at all after the factory reset.

Trimble recommends that you remove the work profile if you have installed Work accounts, remove all personal accounts from the device, and remove device security BEFORE you reset the device to factory settings.

1. Open **Settings/ Passwords & accounts**
2. If Personal and Work tabs are shown, select the **Work** tab, scroll down and tap **Remove work profile**. The **Work** tab will disappear.
3. Tap on each account shown and **Remove** the accounts (this will require you to enter your PIN and/or Password).
4. Select **Settings / Security & privacy / Device unlock**.
5. Tap on the screen lock and select **None**.

Erasing your data may take some time, so make sure that you plug your device into a power source before you start.

1. Tap  to open the **Settings** app.
2. Tap **System**.
3. Tap **Reset options**, and then tap the reset option you want to use:
 - **Reset Wi-Fi, Mobile & Bluetooth**
 - **Reset app preferences**
 - **Erase all data (factory reset)**. Select this option to factory reset the device to the original state it was shipped in.
4. Follow the on-screen instructions for the option you selected. You may need to enter your unlock pattern, PIN, or password.
5. When the device has finished erasing, you'll be prompted to go through the new device setup.

Operating system and software updates

Periodically, operating system and software application updates will be available for your device. You will be notified when operating system updates are available to download and install; an internet connection is required.

Software downloads and updates

The latest versions of software including drivers, firmware updates, and software utilities, are available at <https://mcs.trimble.com/> or through the Trimble Installation Manager app that is installed on your device. Additional material and information can be found at <https://help.fieldsystems.trimble.com/portal/home.htm>.

Repairing your device

Before you send your TSC710 controller for repair, check the troubleshooting guide in this document. If you can't solve the problem with troubleshooting, contact your local Trimble dealer for further support.

Repair of this product should only be performed by an authorized service provider. Any attempt to disassemble this product by a non-authorized service provider will void the warranty.

For more information, contact your local Trimble dealer.